

光彩演绎世界

Lighting Illustrates The World



炫艺电子 | 艺林照明

广州市白云区石门街朝阳亭北路245号

86-20-3613 8602 86-20-3613 0623

info@stslite.com

www.stslite.com.cn

STS INDUSTRIAL | STS LITE

No.245 Tingshi Road Chaoyang Shimen Baiyun Guangzhou China

86-20-3613 8602 86-20-3613 0623

angelhsu@stslite.com

www.stslite.com



All specification subject to change without prior notice.

光彩演绎世界

Lighting Illustrates The World



广州炫艺电子有限公司

广州炫艺电子有限公司（艺林照明）成立于2012年，是一家集设计、研发、生产、销售和服务为一体的专业舞台灯光设备制造商。本公司专注于生产LED摇头灯、LED光束灯、LED室内室外染色灯等。稳定的生产管理团队，先进的生产设备及测试仪器，以ISO管理体系为基础，从原材料、半成品到产成品出货检验严格按标准化执行。

优秀的营销团队和国内、外各区域渠道合作伙伴，专业的技术售后团队，对于市场开拓和产品售后服务等方面有着健全的管理方案，销售网络和产品销售遍布国内、外。强大、专业的研发团队和先进、完善的销售服务理念，使得我们公司的产品在国内、外有着较高的知名度和市场占有率，尤以欧美为主，产品经过了欧洲的CE、美国FCC、C-Tick等认证。公司可根据客户需求定制产品及OEM订单。

“质量第一，客户至上”是我们的经营方针，始终把客户的利益放在第一位，竭诚为我们的每一个客户提供最好产品和最优质的服务。工厂位于白云区，40分钟车程可到达机场、市区及火车站转至深圳及香港。我们将继续遵循以人为本，追求完美的服务宗旨，竭力满足广大客户的需求，不断创新，持续努力，与客户携手前进，共同创造一个美好的明天。



GuangZhou STS Lighting Equipment Co.,Ltd.

STS is the professional manufacturer and exporter comprehensive for design, R&D, production, sales and service of lighting equipment. We have a progressive experienced production management team and a professional follow-up service team. Based on ISO management system, we strictly execute the standard quality inspection from the raw material, semi-product, to the final product.


Our main products are LED moving head, LED moving beam, LED wash (indoor and outdoor), DMX controller and fogger machine. Our Business Policy is “Quality first, customer foremost” We work also with the well-known names in the world at OEM.

The factory is located in Baiyun district where it is convenient to go to airport, east railway station, HongKong and downtown. We work on “People Oriented”, pursuit service perfection, and try to meet the requirement of our dearest customers. We shall persist to innovate, and work together with our partners, to make a bright future.



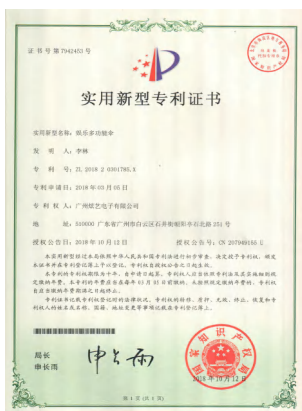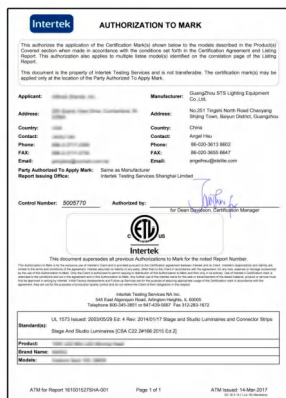

- ▶ 摇头灯 Moving Head Lights.....01
- ▶ 光束灯 Moving Head Beam.....11
- ▶ LED图案灯 Moving Head Spot.....14
- ▶ 防水摇头灯 IP Moving Head.....22
- ▶ 染色摇头灯 Moving Wash.....26
- ▶ 效果灯 Effect lights.....38
- ▶ 帕灯 Par Lights.....44
- ▶ 控制系统 DMX Controller.....52
- ▶ 配件 Accessories.....53

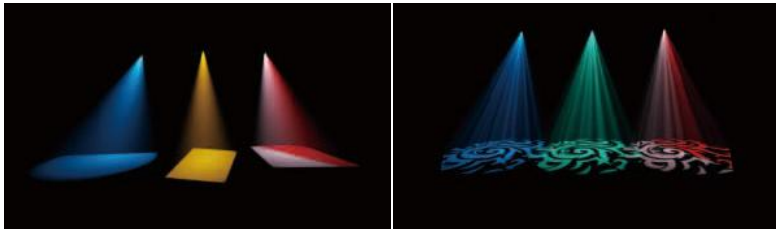

参数

- 100~240V AC, 50/60Hz
- 550W高亮LED, 灯珠寿命:20,000小时, 显指 $\geq 76/90$
- 28000Lux@5米@6°, 放大角度: 6° ~60°
- 36 DMX 通道
- 1个颜色盘, 5个固定式色片+白光, 半色流水效果
- 1套 CMY+CTO混色系统, 色温(2700K~8000K)可调
- 1个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 6个插拔式的旋转图案片+白光, 图案抖动, 旋转功能
- 1个效果图案盘, 可形成火焰, 潺潺流水等动态效果
- 1个切割盘, 4个切割片组成的切割系统, 整个切割系统可90° 旋转
- 4棱镜, 双向旋转, 速度和方向可DMX控制
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走, RDM
- 雾化透光率大于90%的雾化片
- 电子调焦, 5~100%光圈调整
- 产品尺寸:46.4*30.4*78.4厘米, 净重:37.5公斤
- 航空箱:1装1

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- Profile/Spot/Wash/Beam 4-in-1 Hybrid
- 550W white LED, CCT:6300K, Lifes:20000Hours, CRI $\geq 76/90$
- 28000Lux@5m@6°, Zoom beam angle:6~60°
- 36DMX Channel
- 1 Color wheel, 5 colors plus white
- 1 Cmy color mixing + CTO linear(2700-8000K), split colors and change colors rainbow effect
- 1 Static gobo wheel, 7 interchangeable gobos plus blank
- 1 Rotating gobo wheel, 6 interchangeable gobos plus blank
- 1 Effect gobo wheel, 1 corrugated gobo, can be superimposed with other gobos and make dynamic effects
- 1 Framing system, 4 plates cut, with the ability to create different shapes, Framing rotation of 90°
- Rotated 4-prism, Dimmer, Focus, Frost, Iris and zoom effect
- RDM, remote reset DMX address, fixture reset, DMX512, Auto, Sound, Stand-alone and Master-Slave mode
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- 540° Pan Moving, 270° Tilt Moving, 16Bit resolution
- Produce size: 46.4*30.4*78.4cm, N.W.:37.5kg
- Flightcase: 1 Pack 1

参数


- 100~240V AC, 50/60Hz
- SIRIUS HRI 462W 灯泡, 寿命:2500小时
- 180,000Lux@5米@3.5°, 光束角度放大:3.5°~34°
- 24 DMX 通道
- 1个色片盘, 9个固定式色片+白光, 半色流水效果
- 1套CMY+CTO混色系统, 色温(2700K~7800K)可调
- 1个固定图案盘, 11个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个插拔式的旋转图案片+白光, 图案抖动, 旋转功能
- 1个效果图案盘, 5个图案加效果盘, 可形成火焰, 潺潺流水等动态效果
- 8棱镜加16棱镜, 双向旋转, 速度和方向可DMX控制
- DMX, 主/从, 声控/自走, RDM
- 触摸屏+按键, 一键拨码功能。中英双语, 倒转显示设置
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦
- 雾化透光率大于90%的雾化片
- 包装尺寸:53.0*50.0*63.0cm厘米, 毛重:27.0公斤
- 航空箱:1装1/1装2 可选



TECHNICAL

- 100~240V AC, 50/60Hz
- SIRIUS HRI 462W bulb, Lifes:2500Hours
- 24DMX channel
- 80,000Lux@5M@3.5°, Zoom beam angle:3.5°~34°
- 1 Color wheel, 9 colors plus white
- Cmy color mixing + CTO linear, split colors and change colors rainbow effect
- 1 static gobo wheel, 11 fixed pattern with white light
- 1 rotating gobo wheel, 7 interchangeable gobos plus blank
- 1 effect pattern disc, 5 effect patterns with white light, the pattern disc can shake and flow in both directions
- 8 prisms and 16 prisms, with adjustable speed
- Focus □ amplification □ Frost
- DMX512, Auto, Sound, Stand-alone and Master-Slave mode, RDM
- 540° Pan Moving, 270° Tilt Moving, 16Bit resolution
- LCD colorful display, Touch screen and 5 menu buttons
- Packaging size: 53.0*50.0*63.0cm, GW: 27.0kg
- Flightcase: 1 Pack 1/1 Pack 2 in optional



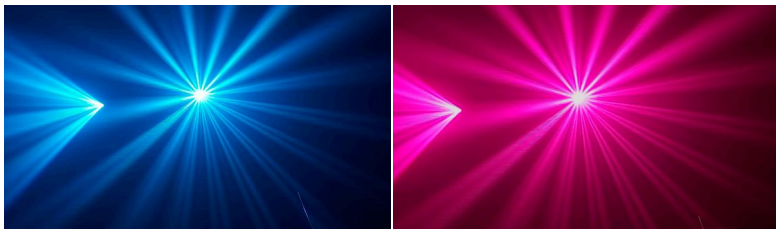

参数

- 100~240V AC, 50/60Hz
- SIRIUS HRI 371W 灯泡, 寿命: 2500小时
- 153,000Lux@10m@3.5°, 放大角度: 3.5° ~ 34°
- 22/26 DMX 通道
- 1个色片盘, 13个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 11个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个插拨式的旋转图案片+白光, 图案抖动, 旋转功能
- 1个效果图案盘, 5个图案加效果盘, 可形成火焰, 潺潺流水等动态效果
- 8棱镜加16棱镜, 双向旋转, 速度和方向可DMX控制
触摸屏+按键, 中英双语, 倒转显示设置
- DMX: 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- 产品尺寸: 41.0*30.0*63.0厘米, 净重: 22.0公斤
- 航空箱: 1装1/1装2 可选

TECHNICAL

- 100~240V AC, 50/60Hz
- 380W (18R) lamp, Lifes: 2500Hours
- 153000lux@10m at 3.5° and 2250lux@5m at 34°
- 22/26 DMX channel
- 1 Color wheel with 13 diachronic colors plus open
- 1 Static Gobo wheel with 12 gobos plus open.
- 1 Rotating Gobo wheel with 7 rotating gobos plus open
- 1 Static effect Gobo wheel with 5 gobos plus open
- Rotated 8-prism and 16-prism with speed adjustable and variable direction
- Frost and Zoom effect
- Infinite electric focus with 2m range, and shutter with variable speed
- DMX512, master-slave and sound activated controllable and auto with 8 built-in programs, RDM
- 540° Pan Moving, 270° Tilt Moving
- Product size: 41.0*30.0*63.0cm, N.W.: 22.0kg
- Flightcase: 1 Pack 1/1 Pack 2 in optional


参数

- 100~240V AC, 50/60Hz
- SIRIUS HRI 371W 灯泡, 寿命: 2500小时
- 109,000Lux@15米@3°, 光束角度: 3°
- 16 DMX 通道
- 1个色片盘, 14个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 12个固定图案片+白光, 图案抖动功能
- 8棱镜加24棱镜, 可叠加, 双向旋转, 速度和方向可
- DMX控制
- 触摸屏+按键, 中英双语, 倒转显示设置
- DMX: 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 雾化透光率大于90%的雾化片, 七彩效果
- 电子调焦, 任意距离可清晰调焦
- 产品尺寸: 38.0*27.0*60.0厘米, 净重: 23.0公斤
- 航空箱: 1装2



TECHNICAL

- 100-240V AC 50/60HZ
- SIRIUS HRI 371W lamp, Lifes: 2500Hours
- 109,000Lux@15M@3°, Beam Angle: 3°
- 16 DMX channel
- 1 Color wheel with 14 diachronic colors plus open
- 1 Static Gobo wheel with 12 gobos plus open
- Rotated 8-prism and 24-prism with speed adjustable and variable direction
- Frost and Zoom effect
- DMX512, master-slave, Auto, sound, RDM
- 540° Pan Moving, 270° Tilt Moving
- Mechanical dimming, dual blade tooth dimming plate, random flicker, pulse flicker
- Atomization sheet with a light transmittance greater than 90% and a rainbow effect
- Product size: 38.0*27.0*60.0cm, N.W.: 23.0kg
- Flightcase: 1 Pack 2

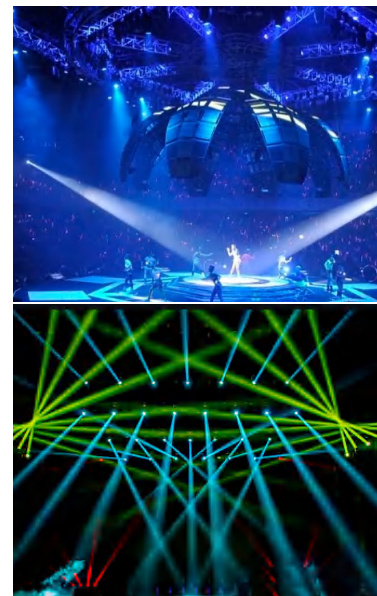



参数

- 100~240V AC, 50/60Hz
- NEOLUX 295W灯泡, 寿命:1500小时
- 310,000Lux@10米@2°, 光束角度:2°
- 16/19 DMX 通道
- 1个色片盘, 14个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 13个固定图案片+白光, 图案抖动
- 8棱镜加16棱镜, 叠加效果, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走, RDM
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片, 七彩镜效果
- 5按键, 中英双语, 倒转显示设置
- 产品尺寸:31.0*21.0*51.0厘米, 净重:14.5公斤
- 航空箱:1装1/1装2 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 295W NEOLUX Lamp, Lifes:1500Hours
- 450000Lux@10m@2°, Beam angle:2°
- 16/19 DMX channel
- 1 Color wheel: 14 colors plus white
- 1 static gobo wheel: 13 gobos plus blank
- Rotating 8-and 24-facet prism, combinable for multi-facet effects
- The prisms rotate in both directions and at different speeds
- 540 °Pan Moving, 270 °Tilt Moving
- DMX512, Auto, Sound, Master-Slave, RDM
- Prism, atomization, seven color effect
- LCD digital display, Touch screen and 5 menu buttons
- Product size: 31.0*21.0*51.0cm, N.W.:14.5kg
- Flightcase: 1 Pack 1/1 Pack 2 in optional


参数

- 100~240V AC, 50/60Hz
- SIRIUS HRI 462W 灯泡, 寿命:2500小时
- 24 DMX 通道
- 1个色片盘, 9个固定式色片+白光, 半色流水效果
- 1套CMY+CTO混色系统, 色温(2700K-7800K)可调
- 1个固定图案盘, 11个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个插拔式的旋转图案片+白光, 图案抖动, 旋转功能
- 1个效果图案盘, 5个图案加效果盘, 可形成火焰, 潺潺流水等动态效果
- 8棱镜加16棱镜, 双向旋转, 速度和方向可DMX控制
- DMX, 主/从, 声控/自走, RDM
- 触摸屏+按键, 一键拨码功能。中英双语, 倒转显示设置
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦
- 雾化透光率大于90%的雾化片
- 包装尺寸:53.0*50.0*63.0厘米, 毛重:27.0公斤
- 航空箱:1装1/1装2 可选



TECHNICAL

- 100~240V AC, 50/60Hz
- SIRIUS HRI 462W bulb, Lifes:2500Hours
- 24DMX channel
- 1 Color wheel, 9 colors plus white
- Cmy color mixing+CTO linear, split colors and change color s rainbow effect
- 1 static gobo wheel, 11 fixed pattern with white light
- 1 rotating gobo wheel, 7 interchangeable gobos plus blank
- 1 effect pattern disc, 5 effect patterns with white light, the pattern disc can shake and flow in both directions
- 8 prisms and 16 prisms, with adjustable speed
- Focus□ amplification□ Frost
- DMX512, Auto, Sound, Stand-alone and Master-Slave mode, RDM
- 540 °Pan Moving, 270 °Tilt Moving, 16Bit resolution
- LCD colorful display, Touch screen and 5 menu buttons
- Packaging size: 53.0*50.0*63.0cm, GW: 27.0kg
- Flightcase: 1 Pack 1/1 Pack 2 in optional

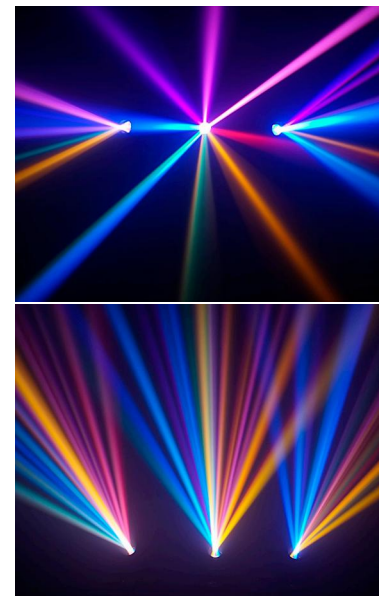



参数

- 100~240V AC, 50/60Hz
- 250W 灯泡, 寿命:1500小时
- 330,000Lux@10米@2°, 光束角度:2°
- 16/20 DMX 通道
- 1个色片盘, 14个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 13个固定图案片+白光, 图案抖动功能
- 24棱镜加16棱镜, 叠加效果, 双向旋转, 速度和方向可DMX控制
- 5按键, 中英双语, 倒转显示设置
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片, 七彩镜效果
- 产品尺寸:33.0*24.0*53.0厘米,净重:14.5公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 250W Lamp, Lifes: 1500Hours
- 330000Lux@10m@2°, Beam angle: 2°
- 16/20 DMX channel
- 1 Color wheel, 14 colors plus white
- 1 Static gobo wheel, 13 gobos plus blank, shake effect
- Rotated 16- prism and 24- prism
- The prisms rotate in both directions and at different speeds
- 540 °Pan Moving, 270 °Tilt Moving
- DMX512, Auto, Sound, Master-Slave, RDM
- Prism, atomization, seven color effect
- LCD digital display and 5 menu buttons, Focus and Frost effect
- Product size: 33.0*24.0*53.0cm, N.W.: 14.5kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 230W 灯泡, 寿命:2500小时
- 放大角度: 3.5~34°
- 1个色片盘, 13个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 11个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个插拔式的旋转图案片+白光, 图案抖动, 旋转功能
- 1个效果图案盘, 5个图案加效果盘, 可形成火焰, 潺潺流水等动态效果
- 8棱镜加16棱镜, 双向旋转, 速度和方向可DMX控制
- 触摸屏+按键, 中英双语, 倒转显示设置
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 机械调光, 双刀叶齿调光片, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- 产品尺寸:41.0*30.0*63.0厘米,净重:22.0公斤
- 航空箱:1装1/1装2 可选



TECHNICAL

- 100V-240V AC, 50Hz/60Hz
- 230W Lamp, Lifes: 2500Hours
- Zoom beam angle: 3.5~34°
- 20/24 DMX channel
- 1pcs static gobo wheel, 7 gobos plus blank
- 1pcs rotating gobo wheel, 11 gobos plus blank
- 1pcs effect gobo wheel: 5 gobos plus blank
- 1pcs Color wheel, 13 colors plus white
- Fast to slow strobe with adjusted speed
- LCD digital display, Touch screen and 4 menu buttons
- Focus, Frost and zoom effect
- Display battery: Long life self-charging buffer battery
- Protocols/Functions: RDM
- Rotated 8- prism and 16- prism With Speed Adjustable
- Pan/Tilt fine, Pan 540, Tilt 270°
- Measurement: 53*50*63cm, N.W.: 25kg
- Flightcase: 1 Pack 1/1 Pack 2 in optional

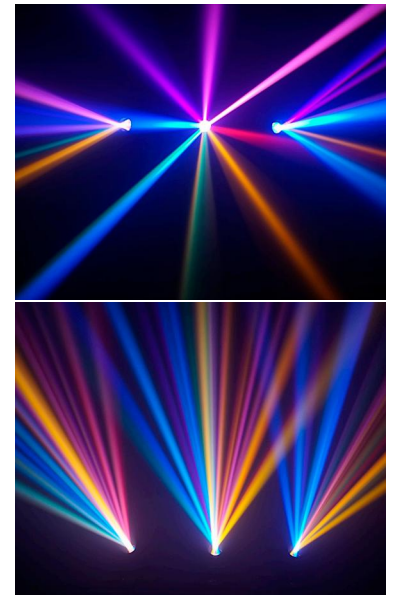



参数

- 100~240V AC, 50/60Hz
- 400W 高亮 LED, 寿命:2000小时
- 120,000Lux@1米@4°, 放大角度:4° ~35°
- 23/26 DMX 通道
- CMY混色, 实现无限色彩变化
- 1个色片盘, 8个固定式色片+白光, 半色效果, 流水功能
- 1个固定图案盘, 12个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 8棱镜加6排镜, 双向旋转, 速度和方向可DMX控制
- 触摸屏+按键, 中英双语, 倒转显示设置
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走, RDM
- 0~100%线性调光, 赫兹频闪, 脉冲频闪
- 雾化透光率大于90%的雾化片, 七彩镜效果
- 电子调焦, 任意距离可清晰调焦
- 产品尺寸:38*27*65厘米,净重:22.9公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100~240V AC, 50/60Hz
- 400W high power LED, Lifes:2000Hours
- 120,000 Lux@5M, Beam angle: 4~35°
- 23/26 DMX channel
- CMY color mixing for indefinite color variations
- 1 Color wheel, 12 dichroic filters plus open
- 1 Static Gobo wheel, 12 gobos and open, shake effect
- 1 Rotating Gobo wheel, 7 gobos and open, slot-in gobo system for easy gobo replacement
- Prism system: one 8-prism + one 6-row mirror, each prism can independently forward and backward
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- LCD digital display and menu buttons
- Product size: 38.0*27.0*65.0cm, N.W.: 22.9kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 250W 高亮 LED, 寿命:5000小时
- 203,500Lux@5M@8°, 放大角度:8° ~30°
- 17 DMX 通道
- 1个色片盘, 9个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 9个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走, RDM
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- 触摸屏+按键, 中英双语, 倒转显示设置
- 产品尺寸:30.5*21.0*55.0厘米,净重:12.9公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100~240V AC, 50/60Hz
- 250W high power LED, Lifes:5000Hours
- 203,500Lux@5M, Beam angle: 8~30°
- 17 DMX channel
- 1 Color wheel, 9 dichroic filters plus open
- 1 Static Gobo wheel, 9 gobos and open, shake effect
- 1 Rotating Gobo wheel, 7 gobos and open, slot-in gobo system for easy gobo replacement
- One 3-prism, each prism can independently forward and backward
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable, RDM
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- LCD digital display and menu buttons
- Product size: 30.5*21.0*55.0cm, N.W.: 12.9kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional

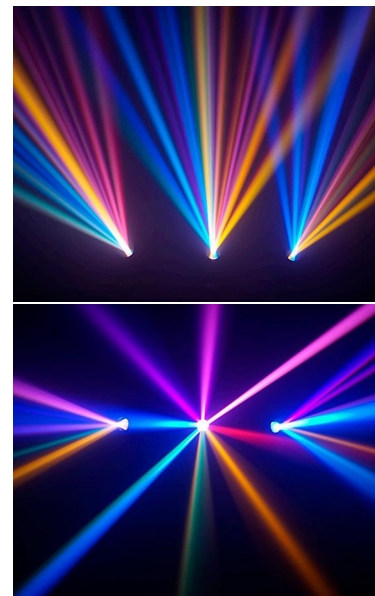



参数

- 100~240V AC, 50/60Hz
- 150W/120W 高亮 LED, 寿命:50,000小时
- 51,500Lux@5米@5°, 光束角度:5°
- 15/19 DMX 通道
- 1个色片盘, 8个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 8个固定图案片+白光, 图案抖动功能
- 8棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+4按键, 中英双语, 倒转显示设置
- 产品尺寸:35.0*25.0*47.0厘米, 净重:9.8公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 150W/120W high power LED, Lifes:50,000Hours
- 51,500Lux@5M@5°, Beam angle:5°
- 15 or 19 DMX channel
- 1 Color wheel with 8 diachronic colors plus open, split colors, rainbow effect
- 1 Gobo wheel with 8 gobos plus open, gobo shaking
- Rotated 8 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display
- Product size: 35.0*25.0*47.0cm, N.W.: 9.8kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 200W/120W 高亮 LED, 寿命:50,000小时
- 39颗5050 RGB 贴片灯珠 / 32颗5050 RGB 贴片灯珠 (120W)
- 151,600Lux@5米@3°, 光束角度:3° (200W)
- 57,800Lux@5米@3°, 光束角度:3° (120W)
- 辅光角度: 120°
- 16 DMX 通道 / 15 DMX 通道 (120W)
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 13个固定图案片+白光, 图案抖动功能
- 8棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:29.0*20.5*44.0厘米, 净重:8.5公斤(200W)
- 产品尺寸:26.5*20.5*37.5厘米, 净重:6.4公斤(120W)
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200W high power LED, Lifes:50,000Hours
- 39pcs 5050 3in1 RGB Led / 32pcs 5050 3in1 RGB Led(120W)
- 151,600Lux@5M@3°, Beam angle:3°(200W)
- 57,800Lux@5M@3°, Beam angle:3°(120W)
- Auxiliary light angle: 120°
- 16 DMX channel / 15 DMX channel(120W)
- 1 Color wheel with 13 diachronic colors plus open, split colors, rainbow effect
- 1 Static gobo wheel with 17 gobos plus open, gobo shaking
- Rotated 8 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, masterslave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display and 5 menu buttons
- Product size: 29.0*20.5*44.0cm, N.W.: 8.5kg(200W)
- Product size: 26.5*20.5*37.5cm, N.W.: 6.4kg(120W)
- Flightcase: 1 Pack 2/1 Pack 4 in optional

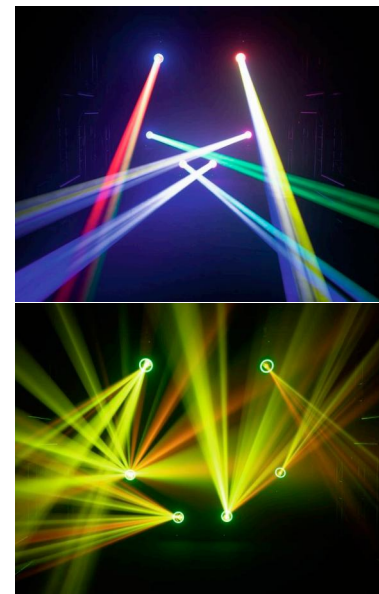



参数

- 100~240V AC, 50/60Hz
- 90W高功率LED灯珠, 灯珠平均寿命:10万小时
- 81000Lux@1米@4°
- 14 DMX 通道
- 1个颜色盘, 7种颜色+白光, 半色和彩虹流水效果
- 1个固定图案盘, 13个图案+白光, 流水和抖动效果
- 8棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 自走/声控
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 透光率高达90%的雾化镜
- 产品尺寸:26.0*20.0*35.0厘米, 净重:5.8公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 90w high brightness white LED, Lifes:100,000Hours
- 81000Lux@1M@4°
- 14 DMX channel
- 1 Color wheel with 7 diachronic colors plus open
- 1 Fixed gobo wheel with 13 fixed gobos plus open
- Rotated 8 facet prism with speed adjustable and variable direction
- 540°Pan Moving, 270°Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- Atomizing mirror with a transmittance of up to 90%
- LCD digital display
- Product size:26.0*20.0*35.0cm, N.W.:5.8kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional

参数


- 100~240V AC, 50/60Hz
- 200W/120W 高亮 LED, 寿命:50,000小时
- 206,900Lux@1米@13°, 放大角度:13°~25° (200W)
- 121,400Lux@1米@12°, 光束角度:12° (120W)
- 17 DMX 通道/15 DMX 通道 (120W)
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 雾化透光率大于90%的雾化片
- 电子调焦, 任意距离可清晰调焦
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:29*20.5*44厘米, 净重:8.2公斤 (200W)
- 产品尺寸:26.5*20.5*37.5厘米, 净重:5.8公斤(120W)
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200w/120w high power LED, Lifes:50,000Hours
- 206,900Lux@1M@13°, Zoom angle:13°~25°(200W)
- 121,400Lux@1M@12°, Beam angle:12°(120W)
- 12/15 DMX channel □ 120W □
- Color wheel with 7 diachronic colors plus open, split colors, rainbow effect
- Static gobo wheel with 7 gobos plus open, gobo shaking
- Rotated gobo wheel with 7 rotated interchangeable gobos plus open
- Rotated 3 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540°Pan Moving, 270°Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display and 5 menu buttons
- Product size: 29*20.5*46.5cm, N.W.: 8.2kg(200W)
- Product size: 26.5*20.5*37.5cm, N.W.:5.8kg(120W)
- Flightcase: 1 Pack 2/1 Pack 4 in optional



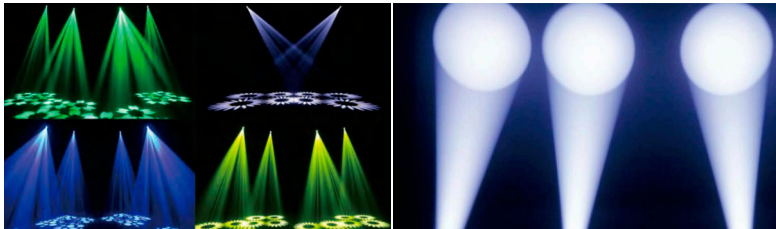

参数

- 100~240V AC, 50/60Hz
- 200W/120W 高亮 LED, 寿命:50,000小时
- 6颗 12w 红绿蓝白+UV 六合一灯珠, 染色角度:40°
- 206,900Lux@1米@13°, 放大角度:13°~25° (200W)
- 121,400Lux@1米@12°, 光束角度:12° (120W)
- 27 DMX 通道/25 DMX 通道 (120W)
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:29*20.5*46.5厘米, 净重:8.2公斤 (200W)
- 产品尺寸:26.5*20.5*37.5厘米, 净重:5.8公斤(120W)
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200w/120w high power LED, Lifes: 50,000Hours
- 6pcs x 12w RGBWA+UV 6in1 LED, Wash angle:40°
- 206,900Lux@1M@13°, Zoom angle:13°~25° (200W)
- 121,400Lux@1M@12°, Beam angle:12° (120W)
- 27 DMX channel /25 DMX channel (120W)
- 1 Color wheel with 7 diachronic colors plus open, split colors, rainbow effect
- 1 Static gobo wheel with 7 gobos plus open, gobo shaking
- 1 Rotated gobo wheel with 7 rotated interchangeable gobos plus open
- Rotated 3 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display and 5 menu buttons
- Product size: 29*20.5*46.5cm, N.W.: 8.2kg(200W)
- Product size: 26.5*20.5*37.5cm, N.W.: 5.8kg(120W)
- Flightcase: 1 Pack 2/1 Pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 200W 高亮 LED, 寿命:5000小时
- 89,100Lux@1米@8°, 放大角度:8°~30°
- 17 DMX 通道
- 1个色片盘, 9个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 9个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走, RDM
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:31.0*23.0*51.0厘米, 净重:14.7公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200W high power LED, Lifes: 5000Hours
- 89,100Lux@1M@2°, Beam angle: 8~30°
- 17 DMX channel
- 1 Color wheel, 9 colors plus white
- 1 Static gobo wheel, 9 gobos plus blank, shake effect
- 1 Rotating Gobo wheel, 7 gobos and open, slot-in gobo system for easy gobo replacement
- Rotated 3---prism, The prisms rotate in both directions and at different speeds
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, Auto, Sound, Master-Slave, RDM
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- LCD digital display and 5 menu buttons, Focus and Frost effect
- Product size: 31.0*23.0*51.0cm, N.W.: 14.7kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional

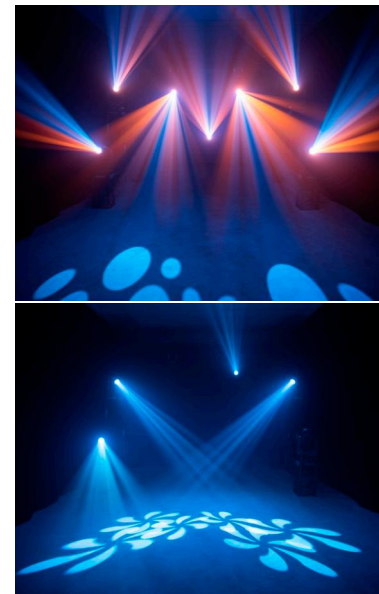



参数

- 100~240V AC, 50/60Hz
- 90W 高亮 LED, 寿命:50,000小时
- 50,700Lux@1米@15°, 光束角度:15°
- 15 DMX 通道
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 6个插拔图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:26.0*20.0*35.0厘米, 净重:5.8公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 90w high power LED, Lifes:50,000Hours
- 50,700Lux@1M@15°, Beam angle:15°
- 15 DMX channel
- 1 Color wheel with 7 diachronic colors plus open, split colors, rainbow effect
- 1 Static gobo wheel with 7 gobos plus open, gobo shaking
- 1 Rotated gobo wheel with 6 rotated interchangeable gobos plus open
- Rotated 3 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display and 5 menu buttons
- Product size: 26.0*20.0*35.0cm, N.W.:5.8kg
- Flightcase:1 Pack 2/1 Pack 4 in optional


参数


- 100~240V AC, 50/60Hz
- 200W/120W 高亮 LED, 寿命:50,000小时
- 94,600Lux@1米@13°, 光束角度:13° (200W)
- 82,100Lux@1米@13°, 光束角度:13° (120W)
- 14 DMX 通道/15 DMX 通道 (120W)
- 1个色片盘, 8个固定式色片+白光, 半色流水效果
- 1个旋转图案盘, 7个旋转图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+4按键, 中英双语, 倒转显示设置
- 产品尺寸:33.0*23.0*45.0厘米, 净重:10.5公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200W/120W high power LED, Lifes:50,000Hours
- 94,600Lux@1M@13°, Beam angle:13°(200W)
- 82,100Lux@1M@13°, Beam angle:13°(120W)
- 14/15DMX channel (120W)
- 1Color wheel, 8 colors plus white
- 1 Rotating Gobo wheel, 7 gobos plus blank
- Rotated 3/8 prism and gobo shaking
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- LCD digital display
- Product size:33.0*23.0*45.0cm, N.W.:10.5kg
- Flightcase:1 Pack 2/1 Pack 4 in optional

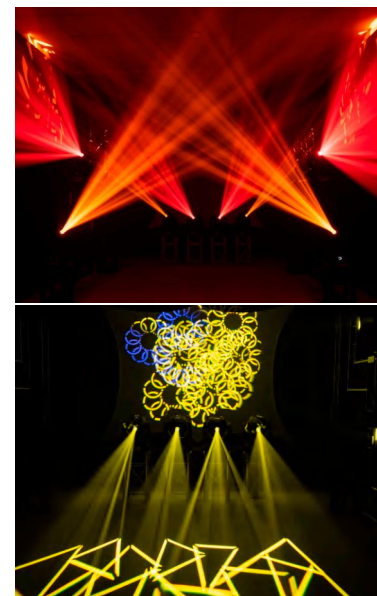

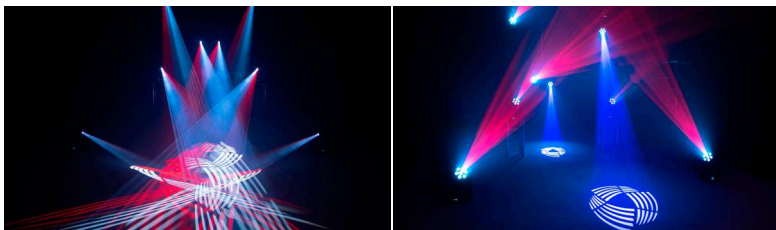

参数

- 100~240V AC, 50/60Hz
- 90W 高亮 LED, 寿命:50,000小时
- 6颗10W RGBWAUV 灯珠, 寿命:50,000小时
- 49,373Lux@1米@15°, 光束角度:15°
- 25 DMX 通道
- RGBWAUV单色, 混色, 渐变, 跳变效果
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 1个旋转图案盘, 6个插拔图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:26.0*20.0*35.0厘米, 净重:5.8公斤
- 航空箱:1装2/1装4可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 90W High power LED, Lifes:50,000Hours
- 6 x 10 W 6in1 HCL RGBWA/UV, Lifes:50,000Hours
- 49,373Lux@1M@15°, Beam angle:15°
- 25 DMX channel
- RGBWA+UV mixing
- 1 Color wheel with 7 diachronic colors plus open
- 1 Fixed gobo wheel with 7 fixed gobos plus open
- 1 Rotated gobo wheel with 6 rotated interchangeable gobos plus open.
- Rotated 3 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display
- Product size: 26.0*20.0*35.0cm, N.W.: 5.8kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional

参数

- 100~240V AC, 50/60Hz
- 60W 高亮 LED, 寿命:50,000小时
- 13,200Lux@1米@12°, 光束角度:12°
- 10/12 DMX 通道
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 7个图案片+白光, 图案旋转, 抖动功能
- 3棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:16.0*14.5*30.0厘米, 净重:3.0公斤
- 航空箱:1装4/1装8 可选



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 60w white LED, Lifes:50,000Hours
- 13,200Lux@1m@12°, Beam angle:12°
- 10/12 DMX channel
- 1 Color wheel with 7 diachronic colors plus open
- 1 Fixed gobo wheel with 7 fixed gobos plus open
- Rotated 3 facet prism with speed adjustable and variable direction
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display
- Product size: 16.0*14.5*30.0cm, N.W.: 3.0kg
- Flightcase: 1 pack 4/1 pack 8 in optional





参数

- 100~240V AC, 50/60Hz
- 4个30W LED, 寿命:50,000小时
- 17,000Lux@1米@13°, 光束角度:13°
- 3/5/9/11/17/21/30/38 DMX 通道
- 4个色片盘, 7个固定式色片+白光, 半色流水效果
- 4个固定图案盘, 7个固定图案片+白光, 图案抖动功能
- 540° 水平运动, 180° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 数码管显示+4按键, 倒转显示设置
- 产品尺寸:100*17.5*28.0厘米, 净重:13.5公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 4pcs x30w white Led, Lifes:50,000Hours
- 17,000Lux@1M@13°, Beam angle:13°
- 3/5/9/11/17/21/30/38 DMX channel
- 4 Color wheel with 7 dichroic filters plus open
- 4 Gobo wheel with static gobos, 7 gobos and open
- 540° Pan Moving, 180° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- Digital display + 4 buttons, reverse display settings
- Product size: 100*17.5*28.0cm, N.W.:13.50kg
- Flightcase: 1 pack 2/1 pack 4 in optional

参数


- 100~240V AC, 50/60Hz
- 400W 高亮LED, 8000K色温, 寿命:≥20,000小时
- 11,800Lux@15米, 光束角度: 3°
- 变焦范围:3~26度
- 23 DMX通道
- 1个颜色盘, 8种颜色, CMY无极混色
- 1个固定图案盘, 11种图案
- 1个可旋转图案盘, 8种可插拔图案
- 1个8棱镜, 1个6排镜, 可叠加, 可独立旋转
- 电子调焦
- 独立雾化镜片, 透光率大于90%
- 0~100%线性调光和0~20Hz随机频闪及脉冲频闪
- DMX512、自走, 声控, RDM
- 540° 水平运动, 270° 垂直运动
- 触摸控制界面, 显示温度, 灯珠亮度
- -20℃ ~ 45℃ 工作环境
- 风冷+压铸镁合金, 全程温度监控, 过温自动保护
- IP66 防护等级
- 净 重: 21kg
- 航空箱:1装2



TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 400w high power LED, C.T.O:8000K, Lifes:50,000Hours
- 11,800Lux@15m, Beam angle: 3°
- Zoom angle:3~26°
- 23 DMX channel
- 1 Color wheel, 8 colors, CMY infinite color mixing
- 1 Static gobo wheel with 11 gobos, gobo shaking
- 1 Rotated gobo wheel with 8 rotated interchangeable gobos
- 8-prism, 6-row mirror, stackable, independently rotatable
- Prism, atomization, seven color effect
- DMX512, Auto, Sound, RDM
- 540° Pan Moving, 270° Tilt Moving
- 0~100% linear dimmer and 0~20Hz random flicker and pulse flicker
- Touch control interface, display temperature, LED brightness
- IP66 protection level
- N.W.:21.0kg
- Flightcase:1 Pack 2



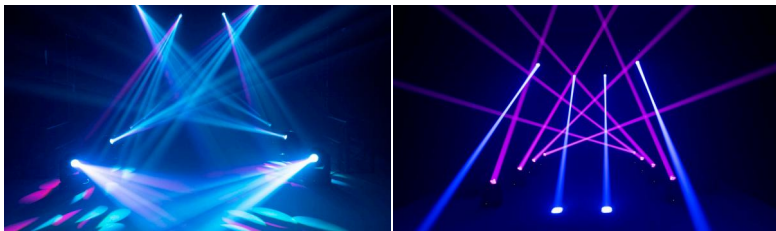

参数

- 100~240V AC, 50/60Hz
- 200W高亮 LED, 寿命:50,000小时
- 放大角度:2°
- 16 DMX 通道
- 1个色片盘, 7个固定式色片+白光, 半色流水效果
- 1个固定图案盘, 13个固定图案片+白光, 图案抖动功能
- 8棱镜, 双向旋转, 速度和方向可DMX控制
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 电子调焦, 任意距离可清晰调焦
- 雾化透光率大于90%的雾化片
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- IP65防护等级
- 产品尺寸:29.0*20.5*44.0厘米, 净重:8.5公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 200w high power LED, Lifes:50,000Hours
- Zoom angle:2°
- 16 DMX channel
- 1 Color wheel with 13 diachronic colors plus open, split colors, rainbow effect
- 1 Static gobo wheel with 17 gobos plus open, gobo shaking
- Rotated 8 facet prism with speed adjustable and variable direction
- Prism, atomization, seven color effect
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD digital display and 5 menu buttons
- IP65 protection level
- Product size: 29.0*20.5*44.0cm, N.W.:8.5kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 19颗40W RGBW 四合一 LED, 寿命:5000小时
- 64,500Lux@5米@9°, 放大角度:9°~35°
- 18/30/94 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 跳变, 蜂眼效果
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 赫兹频闪, 随机频闪
- 触摸按键, 中英双语, 倒转显示设置
- 防护等级:IP65
- 产品尺寸:38.0*35.0*43.0厘米, 净重:24.3公斤
- 航空箱:1装2



TECHNICAL

- 100~240V AC, 50/60Hz
- 19 pcs 40W RGBW 4in1 LED, Lifes:5000Hours
- 64,500Lux@5M@9°, Beam angle: 9°~35°
- 18/30/94 DMX channel
- Pixel LED, LED can be single controlled, Mixing colors, gradients, jumps, and bee eye effects
- 540° Pan Moving, 180° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- With bracket with hinged hooks
- Suitable for outdoor use IP65
- Product size: 38.0*35.0*43.0cm, N.W.:24.30kg
- Flightcase: 1 pack 2

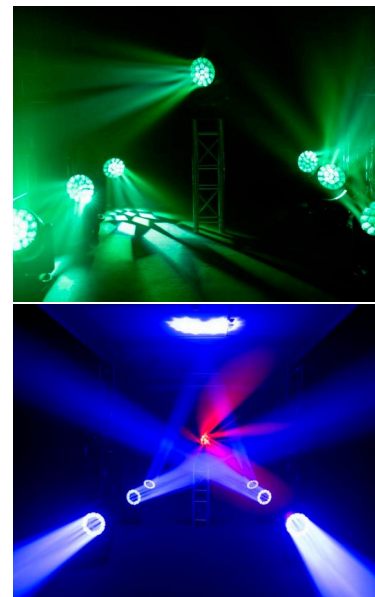



参数

- 100~240V AC, 50/60Hz
- 7颗60W RGBW 四合一 LED, 寿命:5000小时
- 29,500Lux@5米@7°, 放大角度:7°~58°
- 18/26/46 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 蜂眼效果
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 赫兹频闪, 随机频闪
- 触摸按键, 中英双语, 倒转显示设置
- IP65防护等级
- 产品尺寸:33.5*23.0*49.0厘米, 净重:17.0公斤
- 航空箱:1装2

TECHNICAL

- 100V~240V AC, 50/60Hz
- 7 pcs x 60w RGBW 4in1 LED, Lifes:5000Hours
- 29,500Lux@5M@7°, Beam angle: 7°~58°
- 18/26/46 DMX channel
- Pixel LED, LED can be single controlled, Mixing colors, gradients, jumps, and bee eye effects
- 540° Pan Moving, 270° Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- With bracket with hinged hooks
- Suitable for outdoor use IP65
- Product size: 33.5*23.0*49.0cm, N.W.: 17.0kg
- Flightcase: 1 pack 2


参数


- 100~240V AC, 50/60Hz
- 400W RGBW 四合一 COB 灯珠, 寿命:5000小时
- 9400Lux@1米@9°, 放大角度:9°~48°
- 13 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- 调焦效果
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 1~25Hz电子频闪
- DMX, 主/从, 声控, 自走
- LCD显示屏加5按键, 中英双语, 倒转显示设置
- 产品尺寸:22.5*30.0*45.5厘米, 净重:9.60公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100~240V AC, 50/60Hz
- 400W RGBW 4in1 COB LED, Lifes:5000Hours
- Wide angle: 16200Lux@1m@48°
- Narrow angle: 9400Lux@1m@9°
- 13 DMX channel
- RGBW monochrome, mixed color, gradient, and jump effects
- Focus effect
- 540° Pan Moving, 270° Tilt Moving
- 0~100% linear dimmer and 1~25Hz high speed electronic strobe
- DMX512, master-slave and sound activated controllable and auto
- LCD display and 5 menu buttons
- Product size: 22.5*30.0*45.5cm, N.W.: 9.60kg
- Flightcase: 1 Pack 2/1 Pack 4 in optional

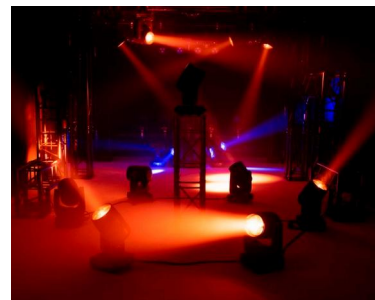

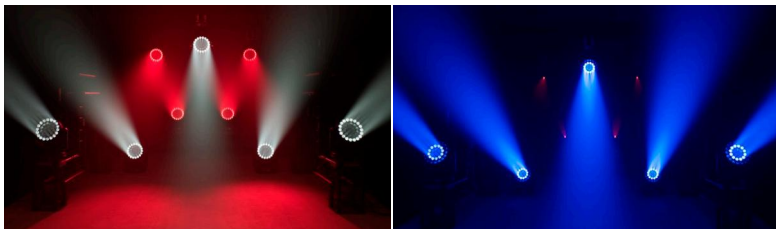

参数

- 100~240V AC, 50/60Hz
- 37颗40W RGBW 四合一 LED, 寿命:5000小时
- 22/36/133/184 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 蜂眼效果
- CTO:2800k~8500k色温调节
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:50.0*29.0*49.0厘米, 净重:24.2公斤
- 航空箱:1装2

TECHNICAL

- 100~240V AC, 50/60Hz
- 37x40w RGBW 4 IN 1 high power LEDs, Lifes:5000Hours
- 22/36/133/184 DMX channel
- Pixel LED, LED can be single controlled, Mixing colors, gradients, jumps, and bee eye effects
- CTO: 2800k~85000 color temperature adjustment
- DMX512, master-slave, Auto, sound and RDM
- 540 °Pan Moving, 270 °Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- Product size:50.0*29.0*49.0cm, N.W.:24.2kg
- Flightcase: 1 pack 2


参数

- 100~240V AC, 50/60Hz
- 37颗15W RGBW 四合一 LED, 寿命:5000小时
- 16,100Lux@5米@7°, 放大角度:7° ~60°
- 24/36/48 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 内置多种动/静态效果
- CTO:2800k~8000k色温调节
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:39.0*26.5*47.5厘米, 净重:13.2公斤
- 航空箱:1装2



TECHNICAL

- 100V~240V AC, 50/60Hz
- 37x15w RGBW 4in 1 LEDs, Lifes:5000Hours
- 16,100Lux@5M@7°, Zoom angle:7°~60°
- 24/36/48 DMX channel
- RGBW point control, monochrome, mixed color, gradient, jump, built-in multiple dynamic/static effects
- CTO: 2800k~85000 color temperature adjustment
- DMX512, master-slave, Auto, sound and RDM
- 540 °Pan Moving, 270 °Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- Product size:39.0*26.5*47.5cm, N.W.:13.2kg
- Flightcase: 1 pack 2

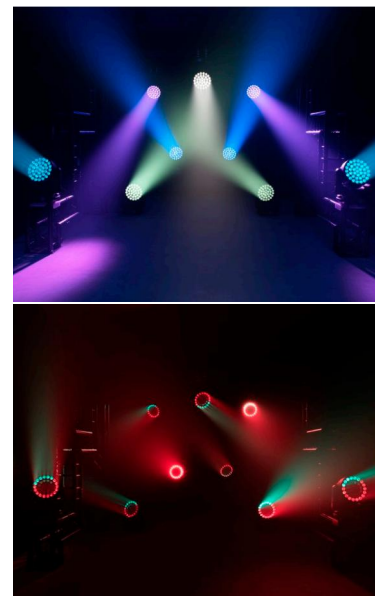



参数

- 100~240V AC, 50/60Hz
- 12颗40W RGBW 四合一 LED, 寿命:5000小时
- 18,600Lux@5米@12°, 放大角度:12° ~55°
- 11/17/18/58 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 内置多种动/静态效果
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:38.0*27.0*46.5厘米, 净重:13.9公斤
- 航空箱:1装2

TECHNICAL

- 100V~240V AC, 50/60Hz
- 12 pcs 40W RGBW 4in1 LED, 50000 hours lifetime
- 18,600Lux@5M@12°, Zoom angle:12°~55°
- 11/17/18/58 DMX channel
- RGBW point control, monochrome, mixed color, gradient, jump, built-in multiple dynamic/static effects
- DMX512, master-slave, Auto, sound and RDM
- 540° Pan Moving, 270° Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- Product size: 38.0*27.0*46.5cm, N.W.: 13.9kg
- Flightcase: 1 pack 2

参数


- 100~240V AC, 50/60Hz
- 19颗40W RGBW 四合一 LED, 寿命:5000小时
- 54颗5050 RGB灯珠, 多种动态效果
- 29,100Lux@5米@7°, 放大角度:7° ~45°
- 21/33/97 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 蜂眼效果
- CTO:2800k~8500k色温调节
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:37.5*26.5*49.0厘米, 净重:16.8公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100~240V AC, 50/60Hz
- 19pcs x 40w bright RGBW 4 in 1 LED, Lifes:5000Hours
- Auxiliary light 54pcs 5050RGB
- 29,100Lux@5M@7°, Zoom angle:7°~45°
- 21/33/97 DMX channel
- Pixel LED, LED can be single controlled, Mixing colors, gradients, jumps, and bee eye effects
- CTO: 2800k~85000 color temperature adjustment
- DMX512, master-slave, Auto, sound and RDM
- 540° Pan Moving, 270° Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- Product size: 37.5*26.5*49.0cm, N.W.: 16.8kg
- Flightcase: 1 pack 2/1 pack 4 in optional



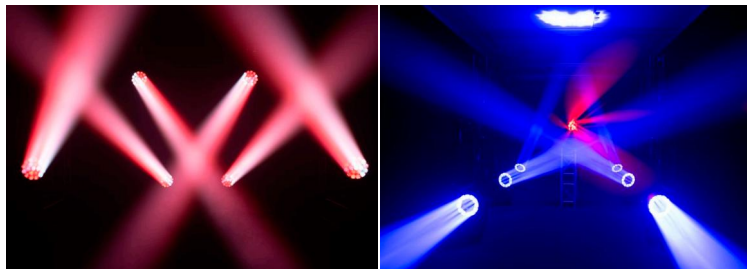

参数

- 100~240V AC, 50/60Hz
- 19颗20W RGBW 四合一 LED, 寿命:5,000小时
- 23400Lux@5米@7° , 放大角度:7° ~55°
- 21/23/78 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 蜂眼效果
- CTO:2800k~8,000k色温调节
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+4按键, 中英双语, 倒转显示设置
- 产品尺寸:30.0*23.0*42.0厘米,净重:10.7公斤
- 航空箱:1装2

TECHNICAL

- 100V~240V AC,50/60Hz
- 19pcs 20w RGBW 4in 1 LEDs, Lifes:5,000 hours
- 23400Lux@5M@7°,Zoom angle:7°~55°
- 21/23/78 DMX channel
- RGBW point control, monochrome, mixed color, gradient, jump, bee eye effect
- CTO: 2800k~8000k color temperature adjustment
- DMX512, master-slave,Auto, sound,RDM
- 540°Pan Moving, 270°Tilt Moving
- 0~100% linear dimming, pulse flicker, random flicker
- LCD digital display and 4 menu buttons
- Product size:30.0*23.0*42.0cm, N.W.:10.7kg
- Flightcase: 1 pack 4

参数

- 100~240V AC,50/60Hz
- 19颗15W RGBW 四合一 LED, 寿命:5000小时
- 7,800Lux@5米@12° , 放大角度:12° ~60°
- 15/25 DMX 通道
- RGBW单色, 混色, 渐变, 跳变, 内置多种动静态效果
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+4按键, 中英双语, 倒转显示设置
- 产品尺寸:37.0*26.0*34.0厘米,净重:7.8公斤
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V AC,50/60Hz
- 19x15w RGBW 4in 1 LEDs,Lifes:5000Hours
- 7,800Lux@5M@7°,Zoom angle:12°~60°
- 15/25 DMX channel
- RGBW monochrome, mixed color, gradient, jump, built-in multiple dynamic/static effects
- DMX512, master-slave,Auto, sound and RDM
- 540°Pan Moving, 270°Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 4 menu buttons
- Product size:37.0*26.0*34.0cm,N.W.:13.2kg
- Flightcase: 1 pack 2/1 pack 4 in optional





参数

- 100~240V AC, 50/60Hz
- 7颗40W RGBW 四合一 LED, 寿命:5000小时
- 42,000Lux@5米@12°, 放大角度:5° ~40°
- 23/35/51 DMX 通道
- RGBW点控, 单色, 混色, 渐变, 跳变, 蜂眼, 内置多种动/静态效果
- CTO:2700K~8000K
- DMX, 主/从, 声控/自走, RDM
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+5按键, 中英双语, 倒转显示设置
- 产品尺寸:26.0*22.0*40.0厘米, 净重:11.2公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 7x40w RGBW 4in 1 LEDs, Lifes:5000Hours
- 42,000Lux@5M@12°, Zoom angle:5°~40°
- 23/35/51 DMX channel
- RGBW point control, monochrome, mixed color, gradient, jump, bee eye, built-in multiple dynamic/static effects
- CTO:27000k~8000K
- DMX512, master-slave, Auto, sound and RDM
- 540°Pan Moving, 270°Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 5 menu buttons
- Product size:26.0*22.0*40.0cm, N.W.:11.2kg
- Flightcase: 1 pack 2/1 pack 4 in optional

参数

- 100~240V AC, 50/60Hz
- 4颗20W RGBW 四合一 LED, 寿命:5000小时
- 1,230Lux@5米@9°, 放大角度:9° ~48°
- 15 DMX 通道
- RGBW单色, 混色, 渐变, 跳变, 放大效果
- DMX, 主/从, 声控/自走
- 540° 水平运动, 270° 垂直运动
- 0~100%线性调光, 脉冲频闪, 随机频闪
- LCD显示屏+4按键, 倒转显示设置
- 产品尺寸:16.0*15.0*25.0厘米, 净重:2.5公斤
- 航空箱:1装4/1装8 可选



TECHNICAL

- 100V~240V AC, 50/60Hz
- 4x20w RGBW 4in 1 LEDs, Lifes:5000Hours
- 1,230Lux@5M@9°, Zoom angle:9°~48°
- 15 DMX channel
- RGBW monochrome, mixed color, gradient, jump, and zoom effects
- DMX512, master-slave, Auto, sound and RDM
- 540°Pan Moving, 270°Tilt Moving
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 4 menu buttons
- Product size:16.0*15.0*25.0cm, N.W.:2.5kg
- Flightcase: 1 pack 4/1 pack 8 in optional





参数

- 100~240V AC, 50/60Hz
- 100W RGBW LED, 寿命:50,000小时
- 26颗0.2W RGB LED辅光, 寿命:50,000小时
- 18,100Lux@1米@35°
- 23 DMX 通道
- RGBW单色, 混色, 渐变, 跳变加辅光效果
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 随机频闪, 脉冲频闪
- 数码管显示+4按键, 倒转显示设置
- 产品尺寸:29.0*29.0*35.0厘米, 净重:3.5公斤
- 航空箱:1装4/1装8 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 100W RGBW 4in1 COB LED, Lifes:50,000Hours
- 0.2W x26pcs RGB mixing, Lifes:50,000Hours
- 18,100Lux@1M@35°
- 23 DMX channel in optional
- RGBW monochrome, mixed color, gradient, jump and auxiliary lighting effects
- 540°Pan Moving, 270°Tilt Moving
- DMX512, master-slave, Auto and sound activated controllable
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- LCD display and 4 menu buttons
- Product size:29.0*29.0*35.0cm, N.W.:3.5kg
- Flightcase: Pack 4/1 Pack 8 in optional


参数


- 100V~240V, 50Hz/60Hz
- 1x60W 高亮度白光灯珠
- 6x10W 红绿蓝 灯珠
- 24x 0.2W 5050 红绿蓝 灯珠
- 镜头前可以在两个方向上旋转
- 1个颜色盘, 7种颜色+白光
- 1个图案盘, 7个固定图案+白光
- 图案抖动和彩虹效果
- DMX, 主/从, 自走/声控
- 0~100%线性调光, 1~20Hz高速电子频闪
- 540° 水平运动, 270° 垂直运动
- DMX, 主/从, 自走/声控
- 航空箱:1装2/1装4 可选



TECHNICAL

- 100V~240V, 50Hz/60Hz
- 1x 60W High intensity white LED in the middle
- 6x 10W RGB LEDs
- 24x 0.2W 5050RGB LEDs
- Colour wheel: 7 Colours + white
- Gobo Wheel: 7 fixed gobos + open
- Gobo shake and rainbow function
- 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- 540°Pan Moving, 270°Tilt Moving, 16Bit resolution
- Lens front can rotate in both directions
- DMX512, master-slave, Auto and sound activated controllable
- Control panel with LED display
- DMX in/output via 3-pin XLR
- Powerconnector input
- Power connector cable and safety cord included
- Flightcase: 1 pack 2/1 pack 4 in optional

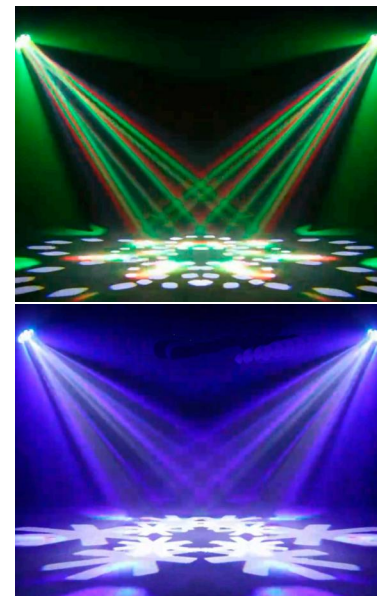

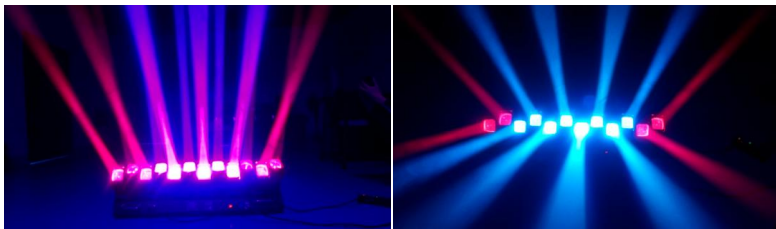

参数


- 100~240V AC, 50/60Hz
- 12颗 60w 四合一 LED灯珠, 寿命: 5000小时
- 20/53/101/155/169通道
- DMX512、自走、主从、声控、带RDM功能
- 32bit 0~100%线性调光
- 单颗摇摆+染色+光束
- 工作环境温度: -30° ~50°
- 1~30Hz 频闪频率
- 外观: 金属、黑色
- DMX512输入输出 / 电源输入输出
- IP20防护等级
- 产品尺寸: 100.0*30.0*16.5厘米, 重量: 26.5公斤
- 航空箱: 1装2 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 12pcs 60w RGBW 4in 1 LEDs, Lifes: 5,000 hours
- 20/53/101/155/169 DMX channel
- DMX512, self-walking, master/slave, voice control, with RDM function
- 32bit 0~100% linear dimming
- Single swing + Wsah + Beam
- Working environment temperature: -30° ~50°
- 1~30Hz stroboscopic frequency
- Appearance: metal, black
- DMX512 Input/Output/Power input/output
- IP20 protection level
- LCD digital display and 4 menu buttons
- Product size: 100.0*30.0*16.5cm, N.W.: 26.5kg
- Flightcase: 1 Pack 2



参数


- 100~240V AC, 50/60Hz
- 114颗 0.2W RGB LED, 寿命: 5000小时
- 34英寸伞, 光区直径145厘米
- 25英寸伞, 光面直径110厘米
- 21英寸伞, 光面直径90厘米
- 6/24 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 包装尺寸: 102.0*28.5*27.0厘米, 1装2, 毛重: 8.5kg
- 包装尺寸: 82.0*28.5*24.5厘米, 1装2, 毛重: 6.5kg
- 包装尺寸: 82.0*28.5*24.5厘米, 1装2, 毛重: 5.7kg
- 航空箱: 1装4/1装6 可选

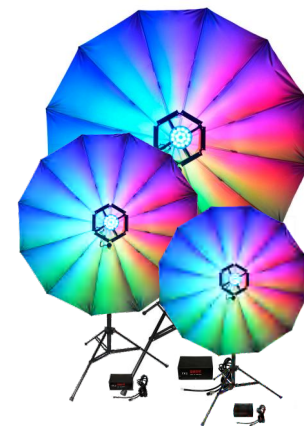

TECHNICAL

- 100V~240V AC, 50/60Hz
- 114pcs 0.2w RGB LED, Lifes: 5000Hours
- 34 inch umbrella with a light area diameter of 145 centimeters
- 21 inch umbrella with a light area diameter of 110 centimeters
- 34 inch umbrella with a light area diameter of 90 centimeters
- 6/24 DMX channel
- RGBW monochrome, mixed color, gradient, and jump effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Package size: 102.0*28.5*27.0cm, 1 pack 2, G.W.: 8.5kg
- Package size: 82.0*28.5*24.5cm, 1 pack 2, G.W.: 6.5kg
- Package size: 82.0*28.5*24.5cm, 1 pack 2, G.W.: 6.3kg
- Flightcase: 1 pack 4/1 pack 6 in optional

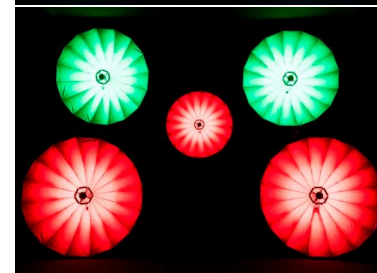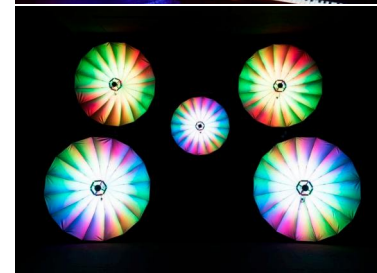

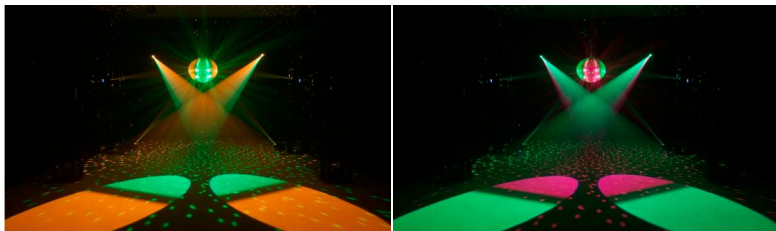

参数

- 100~240V AC, 50/60Hz
- 90W 白光LED, 灯珠平均寿命:20,000万小时
- 32,190Lux@1米, 光束角度: 13°
- 6 DMX 通道
- 1个颜色盘, 7种颜色+白光, 半色效果, 彩虹流水效果
- 1个固定图案盘, 13个图案+白光, 流水效果, 抖动效果
- 频闪效果, 每秒2~18次频闪
- 手动调焦
- DMX, 主/从, 自走/声控
- 数字显示+4个按钮, 反向显示设置
- 产品尺寸: 17.5*16.0*25.5厘米, 净重: 3.1公斤
- 飞行包: 1装4/1装8 可选

TECHNICAL

- 100V~240V AC, 50Hz/60Hz
- 90w white led
- 32,190Lux@1m, Beam angle:13°
- 6 DMX channel
- Color wheel 7 dichroic filters plus open
- Gobo wheel with static gobos, 4 gobos, 3 color dichros and open
- Strobe effect with 2-18 flashes per second
- Manual focus
- DMX512, master-slave and sound activated controllable
- Digital display + 4 buttons, reverse display settings
- Product size:17.5*16.0*25.5cm,N.W.:3.1kg
- Flightcase: 1 pack 4/1 pack 8 in optional

参数


- 100~240V AC, 50/60Hz
- 272颗0.5W LED, 寿命:5,000小时 (120W)
- 836颗0.2W LED, 寿命:5,000小时 (200W)
- 836颗0.5W LED, 寿命:5,000小时 (300W)
- 色温:3200K+5600K, 显指≥95
- 出光角度≥120°
- 4 DMX 通道
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:50.5*32.5*36.5厘米, 净重:5.5公斤
- 开孔尺寸:54.5*36.5厘米, 高10厘米 (120W)
- 产品尺寸:50.0*31.0*11.5厘米, 净重:6.8公斤(200W)
- 产品尺寸:59.0*34.5*10.0厘米, 净重:10.3公斤(300W)
- 航空箱:1装4



TECHNICAL

- 100V~240V AC, 50/60Hz
- 272pcs 0.5W LEDs, Lifes:5,000 hours (120W)
- 836pcs 0.2W LEDs, Lifes:5,000 hours (200W)
- 836pcs 0.5W LEDs, Lifes:5,000 hours (300W)
- Color temperature: 3200K+5600K optional, CRI ≥ 95
- Light output angle ≥ 120°
- 4 DMX channel
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Product size: 50.5*32.5*36.5cm, N.W.:5.5kg
- Hole size: 54.5*36.5 cm, height 10.0 cm (120W)
- Product size: 50.0*31.0*11.5cm, N.W.:6.8kg (200W)
- Product size: 59.0*34.5*10.0cm, N.W.:10.3kg (300W)
- Flightcase: 1 pack 4



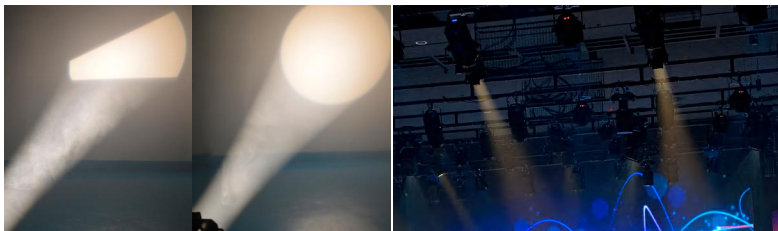

参数

- 100~240V AC, 50/60Hz
- 1颗200W 暖白/冷白 COB, 寿命:5,000小时
- 色温:3200K/5600K, 显指≥95
- 光束角度:5° /10° /19° /26° 可选
- 2 DMX 通道
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:59.0*36.0*55.0厘米, 净重:7.5公斤
- 航空箱:1装4

TECHNICAL

- 100V~240V AC, 50/60Hz
- 200w CW/WW COB LED, Lifes:5,000 hours
- Color temperature: 3200K/5600K optional, CRI ≥ 95
- Beam angle: 5°/10°/19°/26° optional
- 2 DMX channel
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Product size: 59.0*36.0*55.0cm, N.W.: 7.5kg
- Flightcase: 1 pack 4




参数

- 100~240V AC, 50/60Hz
- 384颗 0.5W RGBW 四合一 LED, 寿命:5000小时
- 4/9/16/37 DMX 通道
- RGBW组控/单色/混色/渐变/跳变/跑马流水效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级: IP65
- 产品尺寸:105*150*170毫米, 净重:8.5公斤
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 384pcs 0.5W RGBW 4in1 LED, Lifes:5000Hours
- 4/9/16/37 DMX channel in optional
- RGBW group control, monochrome, mixed color, gradient, jump, racehorse, flowing effect
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- LCD display and 5 menu buttons
- Product size: 105*150*170mm, N.W.: 8.5kg
- Flightcase: 1 pack 2/1 pack 4 in optional

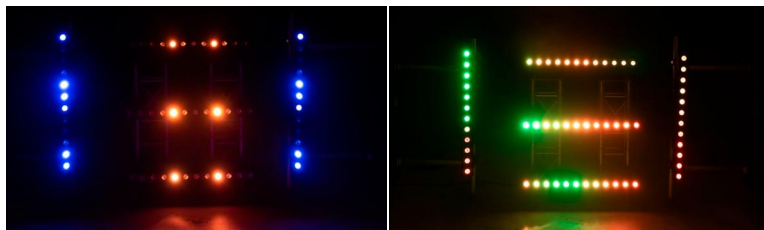

参数

- 100~240V AC, 50/60Hz
- 12颗15W RGBWAUV 六合一 LED, 寿命:5000小时
- 6颗15W RGBWAUV 六合一 LED, 寿命:5000小时
- 光束角度:25° /45° 可选
- 6/11/41/77 DMX 通道
- RGBWAUV点控, 单色/混色/渐变/跳变/跑马流水效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级: IP65
- 产品尺寸:105*150*210毫米, 净重:8.5公斤(12颗)
- 产品尺寸:500*150*210毫米, 净重:4.8公斤(6颗)
- 航空箱:1装2/1装4 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 12x15w RGBWAUV 6in 1 LEDs, Lifes:5000Hours
- 6x15w RGBWAUV 6in 1 LEDs, Lifes:5000Hours
- Beam angle:25°/45° optional
- 6/11/41/77 DMX channel
- RGBWAUV point control, monochrome, mixed color, gradient, jump, racehorse, flowing effect
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- LCD display and 5 menu buttons
- Product size:105*150*210mm, N.W.:8.5kg(1215)
- Product size:500*150*210mm, N.W.:4.8kg(615)
- Flightcase: 1 pack 2/1 pack 4 in optional


参数

- 100~240V AC, 50/60Hz
- 1颗200W COB灯珠, 寿命:5000小时
- 色温:3200K/5600K可选, 显指≥95
- 放大角度:15° ~45°
- 5 DMX 通道
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:27.0*19.0*41.0厘米, 净重:7.2公斤
- 航空箱:1装4/1装6 可选



TECHNICAL

- 100V~240V AC, 50/60Hz
- 200W COB LED, Lifes:5000Hours
- Color temperature: 3200K/5600K optional, CRI≥95
- Zoom angle:15°~45°
- 5 DMX channel
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Product size:27.0*19.0*41.0cm, N.W.:7.2kg
- Flightcase: 1 pack 4/1 pack 6 in optional

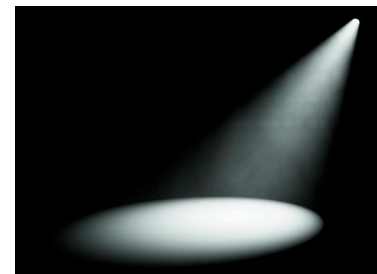




参数

- 100~240V AC, 50/60Hz
- 1颗200W COB灯珠, 寿命:5000小时
- 色温:3200K/5600K可选, 显指 ≥ 90
- 放大角度:15° ~55°
- 2/3/4 DMX 通道
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级:IP65
- 产品尺寸:30.0*31.0*41.0厘米, 净重:8.0公斤
- 航空箱:1装4/1装6 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 200W COB LED, Lifes:5000Hours
- Color temperature: 3200K/5600K optional, CRI ≥ 90
- Zoom angle:15°~55°
- 2/3/4 DMX channel
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- Product size: 30.0*31.0*41.0cm, N.W.:8.0kg
- Flightcase: 1 pack 4/1 pack 6 in optional

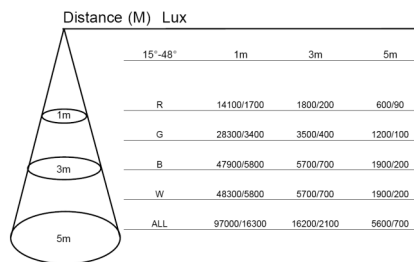

参数


- 100~240V AC, 50/60Hz
- 12颗8W RGBW四合一灯珠, 寿命:5,000小时
- 光源可选单色, 双色, 全彩COB灯珠
- 光束角度:25° /45° /30° /60°
- 4/8 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级:IP20/65
- 产品尺寸:27.0*19.0*30.0厘米, 净重:6.4公斤
- 航空箱:1装4/1装6 可选



TECHNICAL

- 100V~240V AC, 50/60Hz
- 12pcs 8w RGBW 4in 1 COB LED, Lifes:5,000Hours
- Color temperature: CW/WW/RGB optional
- Beam angle: 25°/45°/30°/60°
- 4/8 DMX channel
- RGBW monochrome, mixed color, gradient, and jump effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Protection level: IP20/65
- Product size: 27.0*19.0*30.0cm, N.W.:6.4kg
- Flightcase: 1 pack 4/1 pack 6 in optional



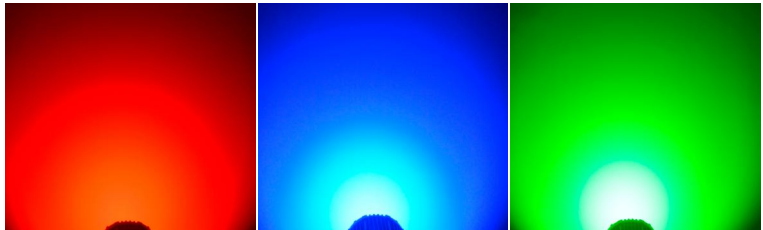


参数

- 100~240V AC, 50/60Hz
- 1颗150W COB灯珠, 寿命:5000小时
- 放大角度:15° ~55°
- 6/8 DMX 通道
- RGB单色, 混色, 渐变, 跳变, 放大效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级:IP65
- 产品尺寸:30.0*31.0*41.0厘米, 净重:8.0公斤
- 航空箱:1装4/1装6 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 150W COB LED, Lifes:5000Hours
- Zoom angle:15°~55°
- 6/8 DMX channel
- RGB monochrome, color mixing, gradient, jump, and zoom effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- Product size: 30.0*31.0*41.0cm, N.W.:8.0kg
- Flightcase: 1 pack 4/1 pack 6 in optional

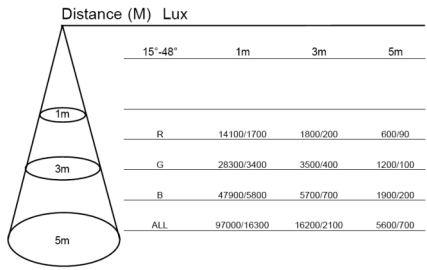

参数

- 100~240V AC, 50/60Hz
- 18颗8W 四合一灯珠, 寿命:5000小时
- 放大角度:25° /45° 可选
- 4/8 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 防护等级:IP65
- 产品尺寸:28.0*24.0*35.0厘米, 净重:4.8公斤
- 航空箱:1装4/1装6/1装8 可选



TECHNICAL

- 100V~240V AC, 50/60Hz
- 18pcs 8w RGBW 4in1 LED, Lifes:5000Hours
- Zoom angle:25°/45° optional
- 6/8 DMX channel
- RGB monochrome, color mixing, gradient, jump, and zoom effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- Product size: 28.0*24.0*35.0cm, N.W.:4.8kg
- Flightcase: 1 pack 4/1 pack 6/1 pack 8 in optional





参数


- 100~240V AC, 50/60Hz
- 1颗100W (暖白+冷白) COB, 寿命:5000小时(100TW)
- 4颗40W (RGBW) COB, 寿命:5000小时(160Q)
- 1颗200W (暖白/冷白) COB, 寿命:5000小时 (200C)
- 色温: 3200K+5600K可选, 显指 ≥ 92
- 光束角度:31.5° ~58°
- 2/4/6/8 DMX 通道
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:34.0*26.0*46.3厘米, 净重:5.4公斤
- 航空箱:1装4/1装6 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 1pc 100w CW+WW COB LED, Lifes:5,000Hours(100TW)
- 4pc 40w RGBW COB LED, Lifes:5,000Hours(160Q)
- 1pc 200w CW+WW COB LED, Lifes:5,000Hours(200C)
- Color temperature: 3200K+5600K optional, CRI ≥ 92
- Beam angle:31.5°~58°
- 2/4/6/8 DMX channel
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- Protection level: IP20/65
- Product size:34.0*26.0*46.3cm, N.W.:5.4kg
- Flightcase: 1 pack 4/1 pack 6 in optional


参数


- 100~240V AC, 50/60Hz
- 120颗3W RGBW LED, 寿命:5000小时
- 光束角度:25° /45° 可选
- 4/8 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:31.0*31.0*41.0厘米, 净重:7.9公斤
- 航空箱:1装4/1装6 可选



TECHNICAL

- 100V~240V AC, 50/60Hz
- 120pcs 3w RGBW 4in1 LED, Lifes:5000Hours
- Zoom angle:25°/45° optional
- 4/8 DMX channel
- RGB monochrome, color mixing, gradient, jump, and zoom effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- Product size::31.0*31.0*41.0cm, N.W.:7.9kg
- Flightcase: 1 pack 4/1 pack 6 in optional

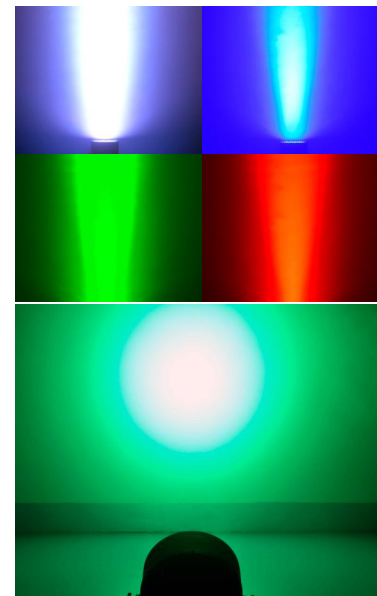

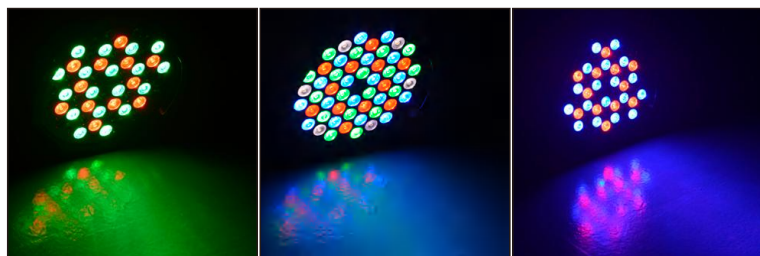


参数

- 100~240V AC, 50/60Hz
- 54颗3W RGBW LED, 寿命:5000小时,
- 放大角度:25° /45° 可选
- 4/8 DMX 通道
- RGBW单色, 混色, 渐变, 跳变效果
- DMX, 主/从, 声控/自走
- 0~100%线性调光, 脉冲频闪, 随机频闪
- 产品尺寸:27.0*22.0*31.0厘米, 净重:2.5公斤
- 航空箱:1装4/1装6/1装8 可选

TECHNICAL

- 100V~240V AC, 50/60Hz
- 54pcs 3w RGBW 4in1 LED, Lifes:5000Hours
- Zoom angle:25°/45° optional
- 4/8 DMX channel
- RGB monochrome, color mixing, gradient, jump, and zoom effects
- DMX512, master-slave, Auto, sound
- 0~100% linear dimming, pulse flicker, random flicker
- IP65 protection level
- Product size:27.0*22.0*31.0cm, N.W.:2.5kg
- Flightcase: 1 pack 4/1 pack 6/1 pack 8 in optional

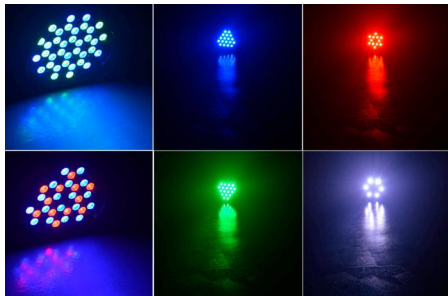

KK-1024



TECHNICAL

- Voltage: 100~240V AC, 50/60Hz
- DMX Channel: 1024
- Intelligent Fixtures: 96
- Dimmer Control Channels: 96

240/240II



TECHNICAL

- Voltage: 100~240V AC, 50/60Hz
- DMX Channel: 240
- Intelligent Fixtures: 12
- Dimmer Control Channels: 16

DMX-80



TECHNICAL

- Voltage: DC9~12V
- DMX channel: 80 CH
- Programs: 99 steps
- Display: Digital display
- Advantage: Easy to learn programming, built-in battery, long standby; Small and beautiful, easy to carry; use beautiful light button
- Dimension: 23*9.5*4.7cm
- Packing: 30.5*14*8.8 cm
- N.W.: 0.64kg, G.W.: 0.80kg

DMX-30



TECHNICAL

- Voltage: DC9~12V
- DMX channel: 30 CH(6*5)
- Programs: 99 steps
- Display: Digital display
- Advantage: Easy to learn programming, built-in battery, long standby; Small and beautiful, easy to carry; use beautiful light button
- Dimension: 20*9.0*5.0cm
- Packing: 26.5*13.4*8.8cm
- N.W.: 0.55kg, G.W.: 0.73kg




USB DMX
Wireless transceiver



3PIN(5PIN)DMX
Wireless transceiver

Flight Case 航空箱

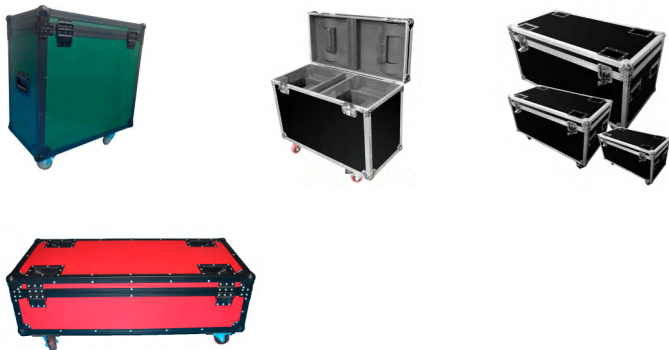


Hand Bag 手提袋



Color Frame色纸架 Frost Lens雾化镜



Barndoor



Color Frame



Corrugated Mirror



Frost Lens

Cables 线材



Power Cable



Power Cable



IP Power Cable



IP Power Cable



IP Power Extension



Power Extension



DMX Cable



IP DMX Cable



IP DMX Cable



IP DMX Cable

Clamps/Safety rope 灯钩/安全绳

Clamps
灯钩Clamps
灯钩Folding bracket
折叠灯钩Clamps
灯钩Safety rope
保险绳