



**STSLITE**

Social Media Marketing



[www.stslite.com](http://www.stslite.com)



Instagram



YouTube



Facebook

**STSLITE | STS INDUSTRIAL**

No.245 Tingshi North Road Chaoyang Shijing Town Baiyun District Guangzhou China 510430


Tel: 86-20-36138602 86-20-36130623

Email: [info@stslite.com](mailto:info@stslite.com) Web: [www.stslite.com](http://www.stslite.com)

*Lighting Illustrates the World*




# IP MSPOT 600CMY

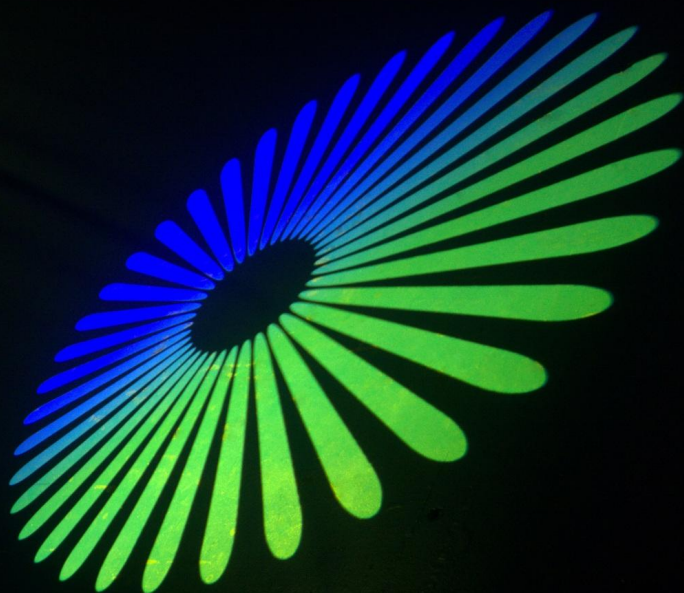

## FEATURE

- \* 100-240V AC, 50/60Hz;
- \* Spot & Beam & Wash 3-in-1 Hybrid
- \* Power consumption: 620w
- \* 600W High-Brightness White LED, Color Temperature: 9000K, CRI: 75
- \* Zoom Beam Angle: 52,210Lux@5m@10° / 3,070Lux@5m@40°
- \* 1pc static gobo wheel: 6 gobos plus blank, Rotating Gobo
- \* 1pc rotating gobo wheel: 7 gobos plus blank, Gobo Shake & Ripple Effect
- \* 1pc Color wheel :6 Colors, CTO plus blank
- \* CMY color mixing for indefinite color variations
- \* Operation Modes: Sound Control, Automatic, Master/Slave, DMX512, RDM
- \* 22/25 DMX channel
- \* Frost Effect: Built-in frost filter for soft, natural beam
- \* DMX Focus: Linear HD adjustment for pattern clarity
- \* Prisms: 1x 8-facet, 1x 6-line
- \* 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- \* Pan/Tilt fine, Pan 540°, Tilt 270°

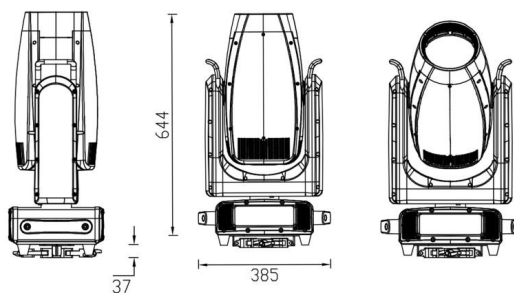

\* Display & Operation: Color LCD, 4 Touch Keys, with Anti-Mishandling Function

\* Protection level: Waterproof IP65

\* Product Dimensions: 39×28×69cm, Net Weight: 23.00 kg

\* Carton Dimensions: 77×36×42cm, Gross Weight: 24.80 kg



[www.stslite.com](http://www.stslite.com)



## IP 550W BEAM MOVING HEAD

### FEATURE



- Input Voltage: 100-240V AC, 50-60Hz
- Light Source: 420W lamp, 7000K color temperature
- Beam Angle: 2 degrees
- DMX Channels: 16 channels
- Color System: 14 colors + white, with smooth color fading effect
- Gobo System: 13 fixed gobos + white, with gobo shake effect
- Operating Modes: Sound-activated, Auto, Master/Slave, DMX512, RDM
- Prism System: 8-facet prism + 48-facet prism, prism combination effect available
- Effects: Frost effect, rainbow effect
- Focus: Motorized linear focus adjustment (1-100%, far to near)
- 540° horizontal / 270° vertical pan & tilt, 16-bit precision scanning
- Dimmer: 0-100% linear dimming
- High-speed strobe, pulse strobe, random strobe
- Strobe: High-speed strobe, pulse strobe, random strobe
- Control Panel: Color LCD display with 4-touch-button (anti-mistouch design)
- Dimensions: 39×28×66cm
- Net Weight: 22kg



www.stslite.com  
光彩演绎世界




## M SPOT 300CMY



## FEATURE

- \* Input voltage: AC100v -240v/50-60HZ
- \* Light source specification: 400W LED,lifes: 20000 hours
- \* Luminous illumination: 5 meters 120000 lm
- \* Total power: 500W
- \* Channel mode: 22/25CH channel optional
- \* PAN: 540 degrees/TILT:270 degrees(16 bit precision scanning) electronic error correction
- \* Dimming system: 0-100% linear adjustment
- \* Focusing system: linear adjustment from 4 meters to 50 meters
- \* Atomization system: 1 independent atomization effect, soft and natural light spot
- \* Zoom beam angle: 4-35 degrees
- \* High speed strobe: 0-30 times/second. Adjustable speed regulation strobe effect.
- \* Color: 12 colors+white light and linear CMY
- \* Fixed pattern: 12 fixed patterns+white light
- \* Rotating pattern: 7 patterns+white light, each glass pattern can be independently reversed
- \* Prism system: 8-prism+6-row mirror, each prism can independently forward and backward
- \* Macro functions: console reset function, self-propelled mode, master-slave mode
- \* Display mode: LCD display, button+touch dual operation mode
- \* Control signal: International standard DMX512. With RDM function, software can be upgraded online and address codes can be dialed
- \* Cooling method: use axial flow fan to enhance cooling
- \* Safety device: Equipped with electronic temperature control overheat protection. When the overheat system fails, the electronic temperature control automatically cuts off the power for protection
- \* Appearance material: high-temperature resistant plastic
- \* Working environment: -20 ° C -40 ° C
- \* Protection level: IP20
- \* Product size: 381\*27\*613mm, N.W.:22.6kg
- \* 1in1 carton packing size: 530\*510\*630mm, G.W.:26.5kg

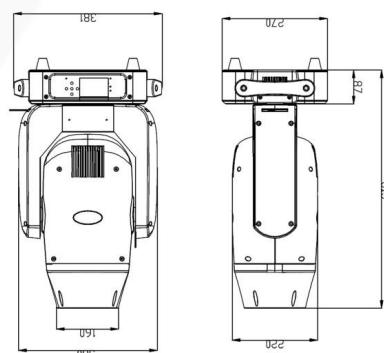

www.stslite.com



# M WASH 6125Z IP

## IP-Rated Outdoor Stage Lighting

Rain-Resistant Design

Powerful Wash Output

Varied Aura Effect Design

Rugged Road-Ready Build



## FEATURE

- \* 90-240V AC, 50/60Hz
- \* Power consumption: 1600W
- \* Main LEDs: 61pcs \* 25W RGBW 4-in-1 LEDs
- \* Ring LEDs: 366pcs \* 0.2W RGB 3-in-1 LEDs
- \* 50,450.00Lux@5m@8°
- \* Zoom Angle: 8-45°
- \* DMX Channels: 27/28/41/42 Channel Modes
- \* Pixel Mode: 183/244 Channel Modes
- \* Control Signal: DMX512, RDM, Master/Slave or Auto Mode
- \* Dyeing function: RGBW color mixing system, uniform color mixing without flicker, fast color rainbow effect, different matrix point control shape combinations effect
- \* 0~100% electronic Zoom system
- \* 1~25Hz electronic strobe with random multi-strobe effects
- \* 0-100% electronic dimmer with 16bit smooth dimming mode
- \* 540 degree PAN and 270 degree tilt movement
- \* Protection Rating: IP65
- \* Product Size: 53×28×67 cm, N.W.: 28.65 kg



More Video, please visit our Youtube: **STS LITE**

Link: <https://youtu.be/Jwyb4dfCjDE>




[www.stslite.com](http://www.stslite.com)



## M WASH 6125ZR

### FEATURE

- \* 90-240V AC, 50/60Hz
- \* Power consumption:1400W
- \* Main LEDs: 61pcs \* 25W RGBW 4-in-1 LEDs
- \* Ring LEDs: 366pcs \* 0.2W RGB 3-in-1 LEDs
- \* Outer Ring LEDs: 94pcs \* 0.2W RGB 3-in-1 LEDs
- \* 79,780.00Lux@3m@15°
- \* Zoom Angle: Narrow angle: 15°, Wide angle: 55°
- \* DMX Channels: 34/35/48/49 Channel Modes
- \* Pixel Mode:183/244 Channel Modes
- \* Control Signal: DMX512, RDM,Master/Slave or Auto Mode
- Dyeing function: RGBW color mixing system, uniform color mixing
- \* without flicker, fast color rainbow effect,different matrix point control shape combinations effect
- \* 0~100% electronic focus system
- \* 1~25Hz electronic strobe with random multi-strobe effects
- \* 0-100% electronic dimmer with 16bit smooth dimming mode
- \* 540 degree PAN and 270 degree tilt movement
- \* Protection Rating: IP20
- \* Product Size: 50×40×62 cm, N.W.: 23.80 kg

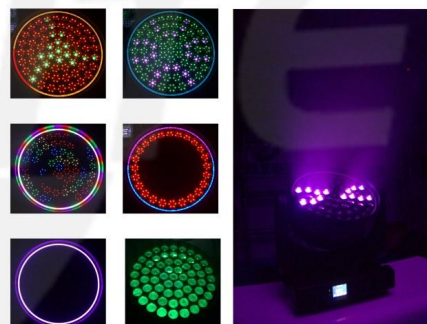

[www.stslite.com](http://www.stslite.com)



STSLITE®

M WASH 1960Z



## FEATURE

### 19pcs 60W RGBW LED Pixel Bee Eye Zoom Wash Moving Head Light

- > AC100-240V, 50/60Hz
- > Light source: 19 pcs 60W RGBW 4in1 LEDs, 50000 hours lifetime
- > Auxiliary light: 52 pcs 0.2W RGB 3in1 LEDs
- > 195380lux@1m@9degree, 52550lux@5m@9degree
- > 109460lux@1m@53degree, 4822lux@5m@53degree
- > Zoom Angle: 9° - 53°
- > Power consumption: 1200W
- > 21/33/97 DMX channels in optional
- > Pixel LED, LEDs can be single controlled
- > RGBW mixing
- > 540 degree pan and 270 degree tilt movement, 3-motor, smooth motion control
- > Electronic Strobe and Dimming
- > DMX512, Master-slave, Stand-alone, Sound mode, and Auto with built-in program
- > LCD display and 5 menu buttons
- > DMX In/Out: 3-Pin and 5-Pin XLR
- > Product Dimensions: 375 x 262 x 490 mm, N.W.: 16.8kg



[www.stslite.com](http://www.stslite.com)



## 3740Z IP VS 1980Z IP

### IP65 Waterproof Stage Light

Built to Perform in Any Environment

Waterproof Design

Stable Output

Stage Ready

Explore Series

37pcs 40W

19pcs 80W

## FEATURE

- \* AC100-240V, 50/60Hz
- \* Power consumption: 1800W
- \* 19pcs 80W 4-in-1(RGBW)LED, Life span $\geq$ 20000H (37pcs 40W LED in option)
- \* Zoom Beam Angle: 20°--45°
- \* Illuminance: 5576Lux@45°@5m, 3154@20°@5m
- \* Channel modes: 21/23/35/78/92/97/99CH
- \* Control Signal: DMX512, Sound control, Auto mode, RDM
- \* Pan 540 degree movement, 16Bit, Tilt 270 degree movement, 16Bit
- \* Display operation: LCD display and touch menu control panel, 180° display setting.
- \* Dimming function: 0-100% electronic dimmer
- \* Strobe function: Fast/slow strobe, pulse and random strobe
- \* Bee-eye effect: Optical lens with 360° infinite rotation, automatic rotation correction, variable kaleidoscope, small waist effect and other lighting effects.
- \* Wash function: RGBW mixing color, Smooth color mixing without flicker, fast rainbow color effect.
- \* CTO: Linear color temperature adjustment
- \* Effect function: Static effect macro function and dynamic effect macro function
- \* Pixel Mode: Light source supports independent control and color changing
- \* Overheat protection: Fan constant speed cooling
- \* Outdoor Waterproof Protection rating: IP65
- \* Connection: Waterproof aviation plug in/out, DMX512: 3/5-XLR put in/out
- \* Product size: 53\*29\*64cm. N.W: 32.0kg.



www.stslite.com



## M WASH 7150Z IP

### FEATURE

- \* AC100-240V,50/60Hz
- \* Power consumption:1000W
- \* Light source:7pcs150W 4-in-1(RGBW)LED,Life span≥20000H
- \* Zoom Beam Angle:5-45degree,107340lux @3m@ 5degree
- \* Channel modes:30/42/58CH
- \* Control Signal:DMX512,Sound control,Auto mode,RDM
- \* Scanning angle:Pan 540 degree movement,Tilt 270 degree movement,16Bit
- \* Display operation:LCD display and touch screen control panel,180°display setting
- \* Dimming function:0-100% electronic dimmer
- \* Strobe function:Fast/slow strobe,pulse and random strobe
- \* Bee-eye effect:Optical lens with 360degree infinite rotation, automatic rotation correction,variable kaleidoscope,small waist effect and other lighting effects
- \* Wash function:RGBW mixing color, Smooth color mixing without flicker,fast rainbow color effect
- \* CTO:Linear color temperature adjustment
- \* Effect function:Static effect macro function and dynamic effect macro function
- \* Pixel Mode:Light source supports independent control and color changing
- \* Overheat protection:Fan constant speed cooling
- \* Protection rating:IP65
- \* Connection:Waterproof aviation plug,DMX512:3/5-XLR put in/out
- \* Product size:42\*42\*59cm.N.W:24.9kg

#### Social Media Marketing



www.stslite.com



Instagram



YouTube




Facebook






## IP M WASH 1925ZR



### FEATURE

- > AC100-240V,50/60Hz
- > Power Consumption:550W
- > Light source:19 pcs 25W 4in1 (RGBW) LED
- > Auxiliary light:114 pcs 0.2W 3in1(RGB)LED,lifespan≥20000H
- > Zoom Beam angle:15°~60°
- > Channel modes: 24/32CH
- > Control modes:DMX512,Sound control,Auto mode
- > Dual Light Source Dynamic Effect Macro Function
- > 0~100% electronic dimmer
- > Fast/slow strobe,pulse and random strobe
- > Pan 540 degree movement,Tilt 270 degree movement,16Bit
- > LCD display and touch menu control panel,180°display setting
- > Waterproof Protection rating:IP65
- > Product size:32\*21\*43cm.N.W.:10.3kg

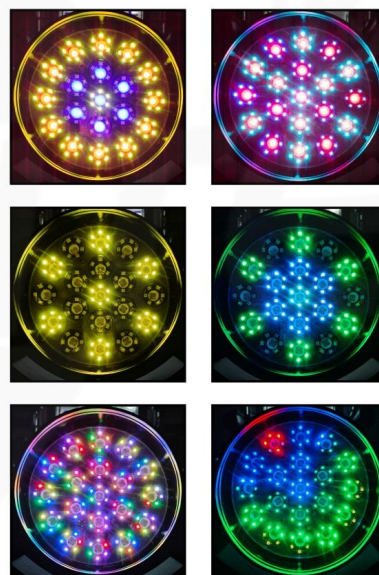

#### Social Media Marketing



www.stslite.com



Instagram




YouTube




Facebook

# M WASH 1915ZR



## FEATURE

- \* Voltage: AC100-240V, 50/60Hz
- \* Power supply: 280W
- \* Light source: 19 pcs 15W RGBW 4in1 LEDs
- \* Auxiliary light: 114 pcs 0.2W RGB 3in1 LEDs
- \* Lifespan:  $\geq 200000$ H
- \* Beam angle:  $5^{\circ}$ - $60^{\circ}$
- \* Channel modes: 23/31CH
- \* DMX512, Sound control, Auto mode
- \* 0-100% electronic dimmer
- \* Fast/slow, pulse & random strobe
- \* Dual light source dynamic effect Macro function
- \* Fixed-speed cooling & heat dissipation fan
- \* Pan  $540^{\circ}$  (16Bit), Tilt  $270^{\circ}$  (16Bit) movement
- \* LCD display & touch screen control panel,  $180^{\circ}$  display setting
- \* RGBW color mixing, flicker-free smooth blending, fast rainbow effect
- \* Protection rating: IP20
- \* Dimensions: 37\*26\*34cm, N.W.: 7.65kg

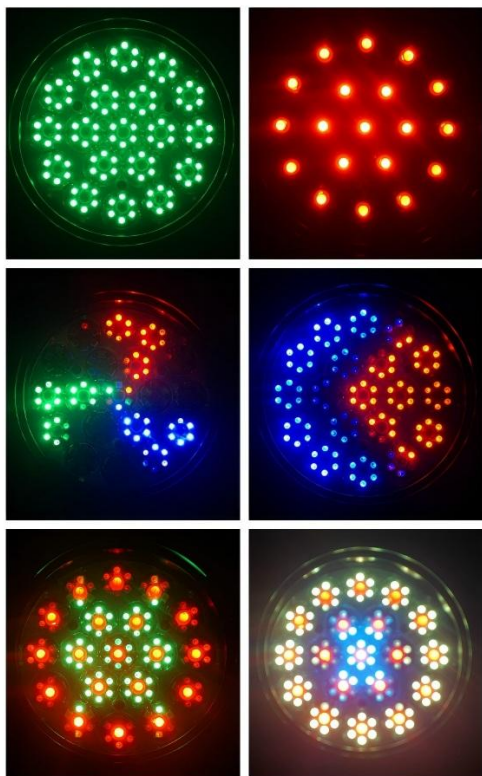

## Social Media Marketing



[www.stslite.com](http://www.stslite.com)



Instagram



YouTube



Facebook



## MINI M WASH 760Z BEE EYE



## FEATURE

- \* Input Voltage: 110-240 V, 50/60 Hz
- \* Power: 550 W
- \* Light Source: 7 x 60W RGBW 4-in-1 color-mixing bee-eye LEDs,
- \* Operating Life: Approximately 50,000 hours
- \* Features: Single-point individual control Full 60W output
- \* Operating Temperature: -20°C to 40°C
- \* Control Methods: DMX 512, Auto, Master/Slave, Sound Control
- \* 3 Channel Modes: (35H/23H/51CH)
- \* Beam Angle: 4°–60° Linear Focus Adjustment
- \* Color Mixing System: RGBW mixing system delivers smooth, uniform color blending without flicker, producing vibrant rainbow effects
- \* Functions: Color wash, strobe, zoom, honeycomb beam effect
- \* Pan: 540° (16-bit) motorized adjustment, Tilt: 270° (16-bit) motorized adjustment
- \* Dimming: 0 - 100%
- \* Display: 1.77-inch color TFT touchscreen with bilingual (Chinese/English) interface for quick operation and menu navigation.
- \* Records device usage time and operating hours; displays device temperature, channel data, and software version information.
- \* Customizable settings menu for configuration via menu navigation and built-in program recall.
- \* Luminaire Material: New fire-resistant engineering plastic material
- \* Product size: 275\*210\*365MM, Net Weight: 6.8KG





## IP M WASH 760Z



### FEATURE

- \* 100-240 V AC, 50/60 Hz
- \* 7pcs x 60w RGBW 4in1 LED, 50000 hours lifetime
- \* Beam angle: 7°-58°
- \* 18/26/46 DMX channel in optional
- \* Pixel LED, LED can be single controlled
- \* Flower effect; strobe effect; wash effect
- \* Auto position correction
- \* Control via stand-alone; DMX; master/slave function
- \* DMX512, Master-slave, Stand-alone, Sound mode, and Auto with built-in programs
- \* 0~100% linear dimmer and electronic strobe
- \* 540 degree PAN and 270 degree tilt movement
- \* 16-bit precision positioning
- \* LCD display and 4 menu buttons
- \* Waterproof Rating: IP65
- \* Dimensions: 34.5x23.5x52cm, Weight: 17.00 kg

#### Social Media Marketing



www.stslite.com




Instagram



YouTube



Facebook





## MINI 7pcs WASH BEE EYE

### FEATURE


- \* 100~240V AC,50/60Hz
- \* 7pcs 40/20w RGBW 4 in 1 Leds in option
- \* 31pcs 0.2w RGB 3 in1 Leds
- \* 25/53 DMX channel in optional
- \* RGBW mixing wash effect
- \* Pixel LED effect
- \* Bee-eye rotating effect and pixel control function
- \* Zoom beam angle 6~35 degree
- \* 540 degree pan and 270 degree tilt movement,3-motor,smooth motion control
- \* 0~100% linear dimmer and 1~20 times/sec high speed electronic strobe
- \* DMX512, Master-slave,Stand-alone,Sound mode,and Auto with built-in programs
- \* LCD display and 4 menu buttons
- \* DMX In/Out:3-Pin, Power in/out
- \* IP20 protection level
- \* Product size: 28\*17\*34cm,N.W.: 6.8kg
- \* Package size 2in1: 53\*42\*35cm,N.W.: 16.5kg



[www.stslite.com](http://www.stslite.com)



## M WASH 660ZPR

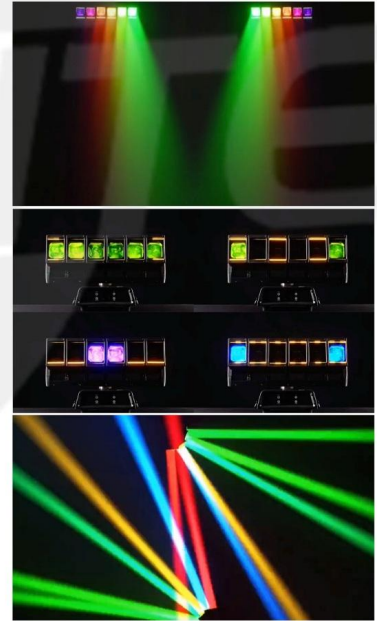

## FEATURE

- \* Voltage: 100-240V AC, 50/60Hz
- \* Power consumption: 450W
- \* Main LED: 6pcs \* 60W RGBW 4-in-1 LEDs
- \* Cold white LED: 6\*(6\*6)pcs 0.2W LEDs
- \* Warm white LED: 6\*(6\*6)pcs 0.2W LEDs
- \* Beam Angle: 4.3-11degree
- \* Spot Angle: 9-18degree
- \* DMX Channels: 22 / 28 / 49 / 97 / 123 Channel Modes
- \* Control Mode: DMX512, RDM, Master/Slave, Sound or Auto Mode
- \* 540 degree PAN and 180 degree tilt movement and 16bit fine
- \* Features: Pan stepless, single Tilt swing+staining+beam, liner CTO color temperature adjustment, cold and warm fill light effects
- \* 1~30Hz electronic strobe with random multi-strobe effects
- \* 0-100% electronic dimmer with 16bit smooth dimming mode
- \* Operating ambient temperature: -20degree to 45degree
- \* Connection: 3-pin DMX input/output, power in/out
- \* Appearance: black
- \* Protection Rating: IP20
- \* Product Size: 544×226×353MM, N.W.: 16.1KG





## M WAVE ZEHN330R

### FEATURE

- \* 100-240V AC, 50/60HZ
- \* Power consumption: 200W
- \* 10pcs 40W RGBW 4in1 LED
- \* 240pcs 0.5W cold white LED
- \* 240pcs 0.5W warm white LED
- \* Pixel LED,wave,wash,beam effect
- \* Control mode: DMX512,Auto,Sound, Manual
- \* DMX Channel: 16/24/84CH
- \* Tilt: 180degree
- \* Dimmer: 0-100% linear dimmer
- \* Strobe:1-30HZ strobe with adjust speed
- \* Power in/out, DMX in/out
- \* Size:87\*10.5\*20.5cm,G.W.:6.95kg



[www.stslite.com](http://www.stslite.com)



## M WASH 520RS

### FEATURE

- \* AC90-240V 50/60HZ
- \* Power consumption: 120W
- \* 5pcs 20W RGBW 4in1 LED
- \* Ring 40pcs 0.2W RGB and 80pcs 0.2W white LED
- \* Beam angle: 3.5degree
- \* Control mode: DMX512,Master-slave,Auto,sound and RDM mode
- \* DMX512 mode: 24/63CH
- \* Dimmer: 0-100% linear dimming
- \* Strobe: 0-25HZ/s electronic strobe
- \* Pan 540degree,Tilt 180degree,with speed adjust
- \* Connector:Power in/out, DMX512 3-Pin in/out
- \* Beam ,wash , pixel,strobe effect
- \* Protection: IP20
- \* Fan cooling
- \* Product size: 48\*18\*26.5cm,N.W.: 4.05kg



[www.stslite.com](http://www.stslite.com)



## PAN/TILT INFINITE

6pcs 60W with Ring Beam Infinite Light

### FEATURE

- \* Voltage: AC90-240V 50/60HZ
- \* Power: 500W
- \* Main LED: 6pcs 60W RGBW 4-in-1 LED
- \* Auxiliary Light: 6\*24pcs 0.3W RGB LED
- \* Channels : 24CH/54CH/74CH
- \* Control modes: DMX512/Scene/voice control/Auto
- \* Pan movement: 540° /infinite rotation
- \* Tilt movement: 270° /360° /infinite rotation
- \* Strobe: 1-25 Hz or random
- \* Linear dimming: 0-100%
- \* Features: Independent single LED swaying, infinite 360° rotation, beam, color, auxiliary light
- \* Display: Chinese/English
- \* Protection rating: IP20
- \* Product size: 126\*13\*30cm, N.W.:22kg



More Video, please visit our Youtube: [STSLITE](#)

Link: <https://www.youtube.com/watch?v=m1gVzcUx2Fo>




[www.stslite.com](http://www.stslite.com)



## LASER LIGHT

12pcs 1W/2W Laser with Ring LED Light

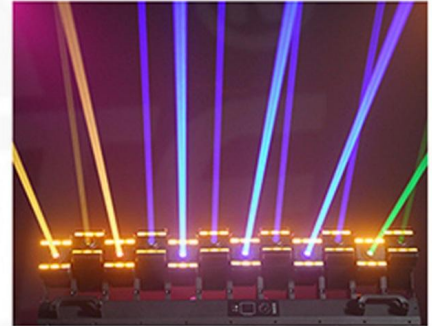

## FEATURE

- \* Voltage: AC100~240V 50/60HZ
- \* Power: 210W
- \* Light source: 12pcs 1W RGB full-color lasers - 24V(2W laser in option)  
432 (3030) cool white + golden yellow light LED- 24V
- \* Control method: DMX512, automatic, master-slave, voice control, with RDM function.
- \* Channel: CH26. CH48. CH96. CH228. CH240
- \* Dimming: 32-bit 0~100% linear dimming
- \* Features: Single swing + dyeing + laser
- \* Cooling mode: Intelligent air-cooled cooling system
- \* Operating temperature: -30°C~50°C
- \* Flicker frequency: 1~30Hz
- \* Appearance: Metallic, black
- \* Connection methods: DMX512 input/output / power input/output.
- \* IP Rating: IP20
- \* Product size: 102\*14.5\*26.5cm,N.W. : 21kg
- \* Package size: 111.5\*39\*27cm,G.W. : 23.5kg

More Video, please visit our Youtube: [STS LITE](#)

Link: <https://www.youtube.com/watch?v=2ungcQ00c4k>




[www.stslite.com](http://www.stslite.com)



## OUTDOOR WATERPROOF IP65 TORNADO

### FEATURE

- \* Voltage: AC100~240V 50/60HZ
- \* Power: 800W
- \* Main light: 5 pcs 1212-120 watts RGB lemon yellow LEDs
- \* auxiliary light: 120 pcs 5050-0.5 watts RGB LEDs
- \* Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
- \* Channels: CH21, CH41, CH71, CH75, CH85, CH170
- \* Dimming: 32bit 0~100% linear dimming
- \* Features: Single swing + dyeing + beam
- \* Working temperature: -30°C~50°C
- \* Strobe frequency: 1~30HZ
- \* Appearance: Metallic, black
- \* Connection: DMX512 input/output / power input/output.
- \* IP Rating: IP65/66
- \* Dimensions: 1000x353x195mm, N.W.: 26.4KG

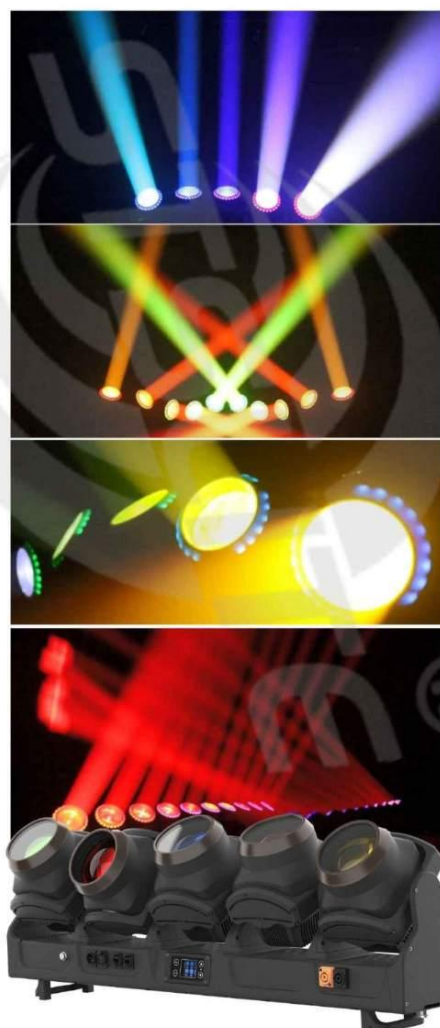



# M SPOT 60TW



## FEATURE

- \* AC100-240V,50/60Hz
- \* 2x 60w white led
- \* 2x 6pcs 10w RGBW 4 in 1 led
- \* 2x 24pcs 0.2W 3 in 1 RGB led
- \* 16/26/31/49 DMX channel in optional
- \* Effect Rotation
- \* Rainbow effect with adjustable speed
- \* Electronic dimmer
- \* Strobe effect with adjustable speed
- \* Internal programs
- \* Sound-control via built-in microphone; sensitivity adjustable
- \* Exact positioning via 16 bit PAN/TILT movement resolution
- \* Positioning within 540° PAN and 200° TILT
- \* DMX-controlled operation or stand-alone operation with Master/Slave function
- \* Control board with 4-digit LED display for adjusting the DMX-starting address, PAN/TILT Reverse, Program, Reset
- \* DMX control via every standard DMX controller
- \* Dimensions:67\*39\*40cm,N.W.:8.55kg



[www.stslite.com](http://www.stslite.com)




# MFLOWER415BAR



## FEATURE

- Power consumption:240W
- 4pcs moving head,each head 4pcs x15w RGBW led , life: 50000 hours
- RGBW monochrome, mixed color
- 5/9/14/16/25/29/44/52 DMX channel in optional
- Rotation lens wheel effect
- Positioning within 540° PAN und 180° TILT
- DMX512, Master-slave,Sound mode,and Auto with built-in programs
- 0~100% electronic linear dimming
- Strobe effect with adjustable speed
- LED display screen+4 buttons, reverse display settings
- IP20 protection level
- LED Moving Heads individually controllabled
- Fixture dimensions: 100x12.3x22.3cm,N.W.:12.90Kg
- Packing dimensions: 108x33x25.5cm,N.W.:14.9Kg



[www.stslite.com](http://www.stslite.com)





# MSPOT30R



## FEATURE


- \* Voltage: 100~240V AC,50/60Hz
- \* Power consumption:140W
- \* 4pcs x30w white led
- \* 7 brilliant, dichroic colors plus white
- \* Rainbow effect with adjustable speed
- \* Gobo wheel with 7 static gobos plus open
- \* Electronic dimmer and strobe
- \* DMX512,stand-alone with Master/Slave function
- \* Sound-control via built-in microphone; sensitivity adjustable
- \* 3/5/9/11/17/21/30/38 DMX channel in optional
- \* Manual focus
- \* Positioning within 540° PAN and 200° TILT
- \* Package size:100\*13\*23cm,N.W.:13.50kg
- \* Carton packing: 108\*31.5\*22cm,G.W.:15.10kg



[www.stslite.com](http://www.stslite.com)



## M BEAM 60BAR

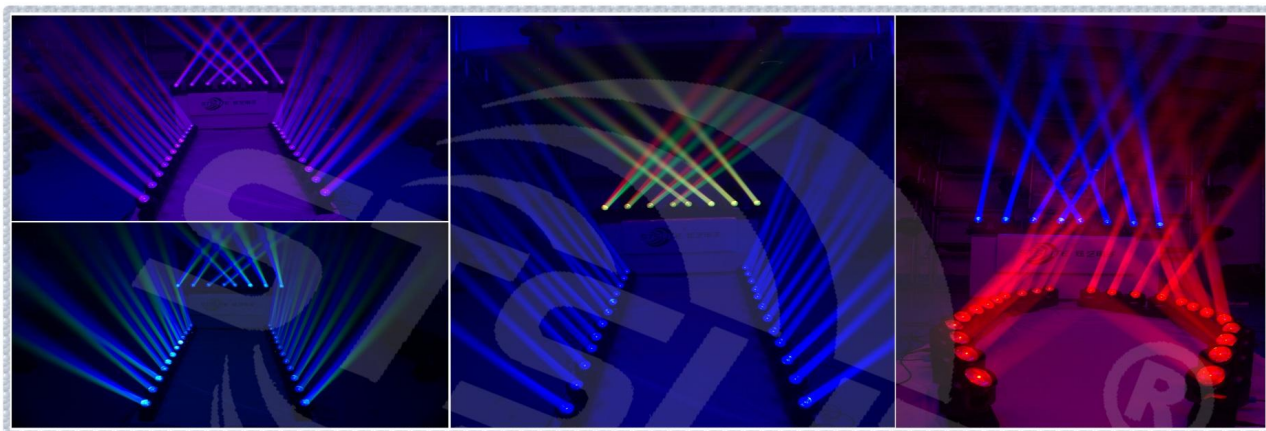

### FEATURE

- 4pcs x60w RGBW led , lifespan: 50000 hours
- RGBW monochrome, mixed color
- 4/8/13/15/23/27/40/48 DMX channel in optional
- Beam effect
- Positioning within 540° PAN und 180° TILT
- DMX512, Master-slave, Sound mode, and Auto with built-in programs
- 0~100% electronic linear dimming
- Strobe effect with adjustable speed
- LED display screen+4 buttons, reverse display settings
- IP20 protection level
- LED Moving Heads individually controllabled
- Fixture dimensions: 100x12.3x22.3cm, N.W.:12.20Kg
- Packing dimensions: 108x31.5x22cm, G.W.:14.0Kg





[www.stslite.com](http://www.stslite.com)



## FEATURE

- \* AC100-240V,50/60Hz
- \* Power consumption:300W
- \* 6pcs 40W COB golden LED
- \* 6 sets of RGB LED
- \* Ring LED: 186pcs 0.2W RGB LED
- \* 24/34/64 DMX channel in optional
- \* 0-100% Electronic dimmer
- \* Strobe effect with adjustable speed
- \* Internal programs
- \* DMX control via every standard DMX controller
- \* DMX-controlled operation or stand-alone operation with Master/Slave function
- \* Sound-control via built-in microphone; sensitivity adjustable
- \* Tilt infinite,Exact positioning via 16 bit TILT movement resolution
- \* Dimensions:121\*34\*40cm,N.W.:14.2kg



www.stslite.com



# INTELLIGENT LIGHTING ART

Smart Circular Light Sculpture

Dynamic Colors

Magic Effect

Custom Ambiance

Discover More

## Magic Flower Light

### FEATURE

- \* AC 100-240V 50/60HZ
- \* Power consumption: 35W
- \* Main Light: 6pcs 4W RGBW 4in1 LED
- \* Background Light: 6\*15pcs 1W RGB LED
- \* Color temperature: 2800K-10000K
- \* LED Life: 50000 hours
- \* Control mode: DMX512, Auto, Sound
- \* DMX Channel: 17/36CH
- \* Dual-motor infinite rotation, mixed color change effect, Kaleidoscope effect, magic flower effect and built-in program effect with adjusted speed
- \* Strobe: 0-20 times/s
- \* Dimmer: 0-100% dimming
- \* Outer diameter: 66cm, inner diameter: 62cm, thickness: 6.5cm+9.5cm
- \* Net Weight: 14.5kg



More Video, please visit our Youtube: [STSLITE](#)

Link: <https://www.youtube.com/watch?v=Zp98iGJxeM8>



[www.stslite.com](http://www.stslite.com)




## MATRIX



MATRIX 533BR



MATRIX 522BR

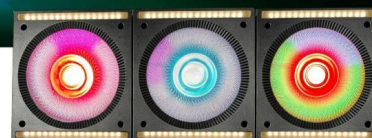

MATRIX 513BR

## FEATURE

- \* AC100-240V,50/60Hz
- \* Power Rating:170W
- \* 4x 50w RGBW led
- \* 50x 4pcs 0.2w 3535 led
- \* 16\*8pcs 2W CW/WW Strobe LED
- \* Single control wash,matrix,strobe effect
- \* DMX512-controlled operation, Auto mode, Sound activated, Master-Slave function
- \* DMX control via every standard DMX controller
- \* 17/24/75 DMX channel in optional
- \* 0-100% Electronic dimmer
- \* Strobe effect with adjustable speed
- \* Sound-control via built-in microphone; sensitivity adjustable
- \* LCD display and 5 menu buttons
- \* Size: 42\*14\*46.5cm, N.W.: 6.45kg



[www.stslite.com](http://www.stslite.com)



## STROBE LIGHT



### Professional LED Strobe Lights

High-Brightness · Custom Effects · Reliable Performance

Explore Products

## FEATURE

| 8 Area                                           | 48+8 Area                                           |
|--------------------------------------------------|-----------------------------------------------------|
| * 800pcs 0.2W RGB 3in1 LED                       | * 864pcs 0.2W RGB 3in1 LED                          |
|                                                  | * 112pcs 0.5W white LED                             |
| * Channel: 7/24/27Channel                        | * Channel: 12/4/6/152/154Channel                    |
| * Madrix 8 area pixel control,wash,Strobe effect | * Madrix 48+8 area pixel control,wash,Strobe effect |
| * AC90-240V 50/60Hz                              |                                                     |
| * Power consumption:120W                         |                                                     |
| * Control Mode: DMX512,Master-Slave,Auto,Sound   |                                                     |
| * 0-100% linear dimmer                           |                                                     |
| * 0-20 Hz Strobe,speed adjust                    |                                                     |
| * Plastic housing                                |                                                     |
| * Product Size:49×25×9cm,1.65kg                  |                                                     |

More video,please visit our Youtube: **STS LITE**  
Link: <https://www.youtube.com/watch?v=F6qZk9ls5VU>



[www.stslite.com](http://www.stslite.com)



# 100/200W COB LED PAR WASH LIGHT

High Power · Smooth Dimming · Professional Stage Lighting



## FEATURE

### 100/200W COB LED (Different color housing in option)

- \* White/ CW 2in1 white/RGB/RGBW/RGBWA+UV 6in1 LED in option
- \* 100-240V AC, 50/60Hz
- \* Functions: static colors, internal programs, color blend, user defined color presets, dimmer and strobe settings, power limitation
- \* Adjustable white balance
- \* DMX-controlled operation or stand-alone operation with Master/Slave function
- \* Sound-control via built-in microphone
- \* Strobe effect with adjustable speed
- \* Beam angle approximately 60°
- \* Comfortable addressing and setting via Control Board with LED display and 4 operating buttons
- \* Ready for connection with power cord and safety plug
- \* Fan cooled





[www.stslite.com](http://www.stslite.com)



# IP CPAR 1004 4-in-1 Waterproof COB Par



## FEATURE

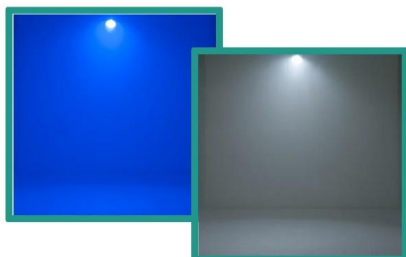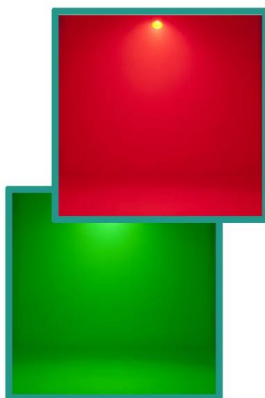

- Input Voltage: 100-240V AC, 50-60Hz
- Power Consumption: 100W
- Light Source: 1x 100W 4-in-1 (RGBW) COB LED, LED Life 50,000 hours
- Display & Control: LCD menu display with 4 buttons
- DMX Channels: 4/8 channels selectable
- Control Modes: DMX, Sound-Active, Master/Slave, Standalone
- Beam Angle: 30 degrees
- Strobe Effect: Pulse strobe
- Dimming: 0-100% electronic linear dimming
- Color Effects: Red, Green, Blue, White static colors; Color mixing, Jump, and Gradient effects
- Cooling Method: Housing cooling / Passive cooling
- Connection: Power cable pass-through (in/out) and 3-pin DMX cable pass-through (in/out)
- IP Rating: IP65
- Housing Material: Die-cast aluminum
- Product Dimensions: 22 x 20 x 14 cm
- Net Weight: 2.80 kg

Distance (M) Lux

|    | 30°   | R     | G      | B     | W      | ALL |
|----|-------|-------|--------|-------|--------|-----|
| 1m | 3,680 | 8,630 | 12,090 | 7,510 | 24,700 |     |
| 3m | 430   | 1,040 | 1,410  | 900   | 3,030  |     |
| 5m | 140   | 390   | 510    | 330   | 1,080  |     |




www.stslite.com

光彩演绎世界



# BAR900IP

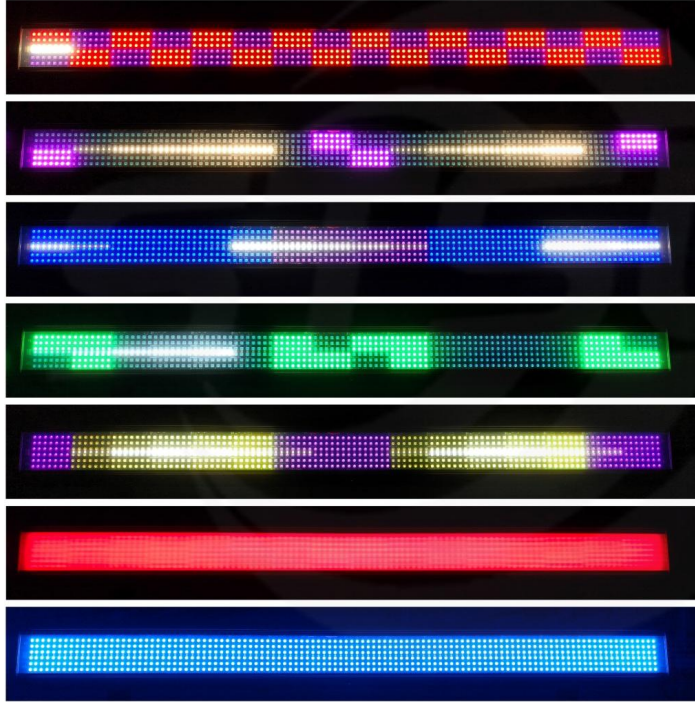

## FEATURE

- \* Light Source: color Light: 672pcs RGB LED, White Light: 112 cold white and warm white 2in1 LED
- \* Power consumption: 460W
- \* Beam Angle: Color Light: 101° White Light: 108°
- \* Spot Angle: Color Light: 149° White Light: 152°
- \* 32-zone independent control for color light, 16-zone independent control for white light, featuring superior color mixing capabilities.
- \* Powerful high-output strobe effect.
- \* Built-in splicing pins enable quick alignment and assembly.
- \* Electronic atomization effect with smooth 0-100% dimming.
- \* Optical system: High-efficiency optical design.
- \* Control & Programming: 4 touch buttons.
- \* Control Panel: 1.77-inch color display.
- \* Control protocols: DMX512, RDM. DMX channel modes: 6/18/81/129 channel.
- \* Software updates: Connect via DMX for firmware upgrades.
- \* Maximum ambient temperature: 40°C; Minimum operating temperature: -10°C.
- \* Maximum surface temperature: 65°C.
- \* Protection rating: IP65
- \* Product size: 105\*19.5\*15.2cm, N.W.: 9kg



[www.stslite.com](http://www.stslite.com)